
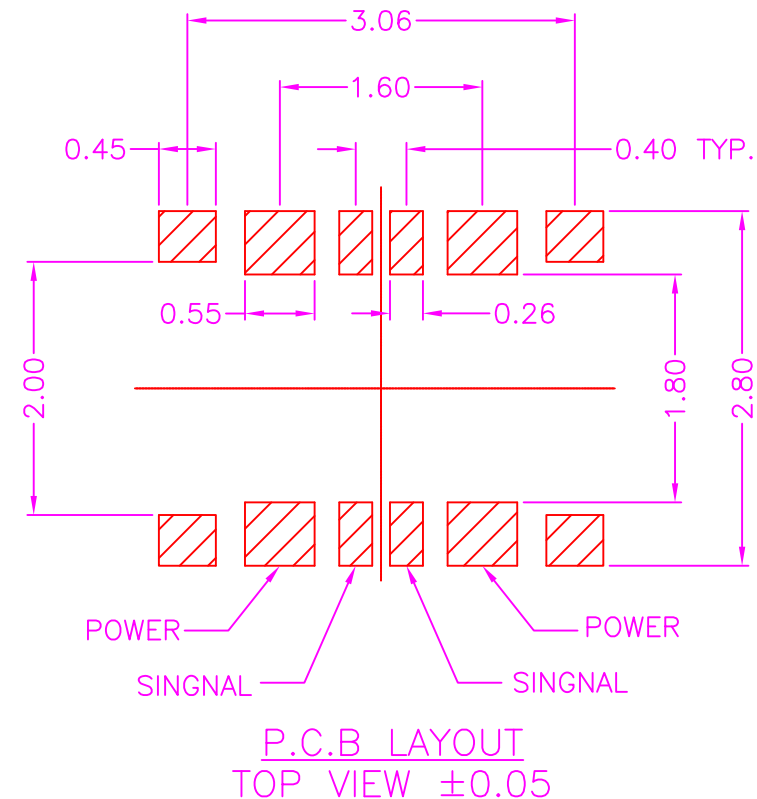


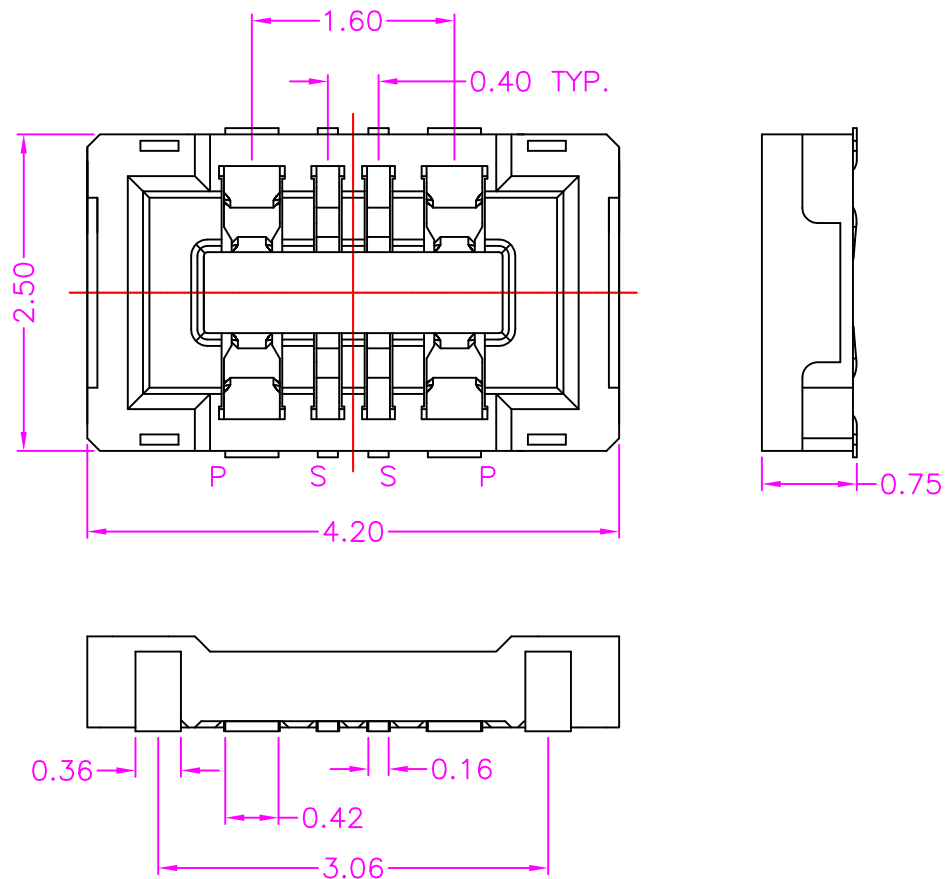

MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
SOLDER PAD: COPPER ALLOY, GOLD PLATED
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 3.0 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 500M OHMS MIN AT DC 100V
OPERATION TEMPERATURE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm$

照片框

ORDER INFORMATION

NPB0415-S070X-08-LF

SERIES

LEADFREE

08 WAY

NON POST

UNMATED HIGH 0.75mm

FEMALE

DESCRIPTION: HIGH CURRENT BTB, 0.40mm PITCH, PCB MOUNT, SMT, 8PIN, FEMALE