


SPECIFICATION

STYLE:		COAXIAL CABLE	
SIZE:		RG-58/U	
STANDARD:			
CONDUCTOR	SIZE	RG58/U	
	MATERIAL	BC	
	CONSTRU	1/0.80 0.02	
INSULATION	STD. THICKNESS	1.08	
	MIN. THICKNESS	0.92	
	DIAMETER	2.95 0.05	
	MATERIAL	PE	
	COLOR	NATURE	
BRAID	MATERIAL	BC	
	CONSTRUCTION	112/0.110 0.008	
JACK	STD. THICKNESS	0.78	
	MIN. THICKNESS	062	
	DIAMETER	4.95 0.10	
	MATERIAL	P.V.C.	
	COLOR	BLACK	

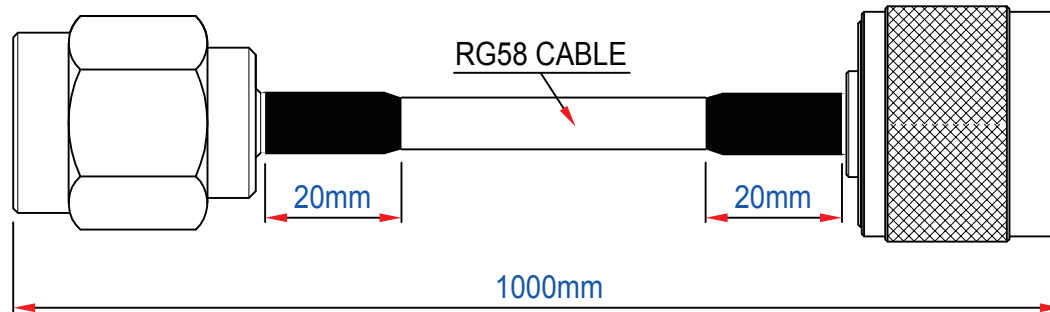

SPECIFICATION

MARKING	RG58U COAXIAL CABLE
CONSTRUCTION DRAWING	
CONDUCTOR _1/0.78BC	INSULATION _PE
	BRAID _112/0.11BC
	JACKET _P.V.C.

4	HEAT SHRINK TUBE	L=20mm BLACK	2
3	CABLE(BLACK)	RG58/U CABLE	1
2	CONNECTOR	N ST. PLUG CONN.	1
1	CONNECTOR	RPSMA ST. PLUG CONN.	1
No.	DESCRIPTION	MATERIAL	Q.TY

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

NRPSMA-1S1S58-M1M-LF
SERIES ST/ST 1000mm MALE TO MALE LEADFREE
RG58/U

DESCRIPTION: