


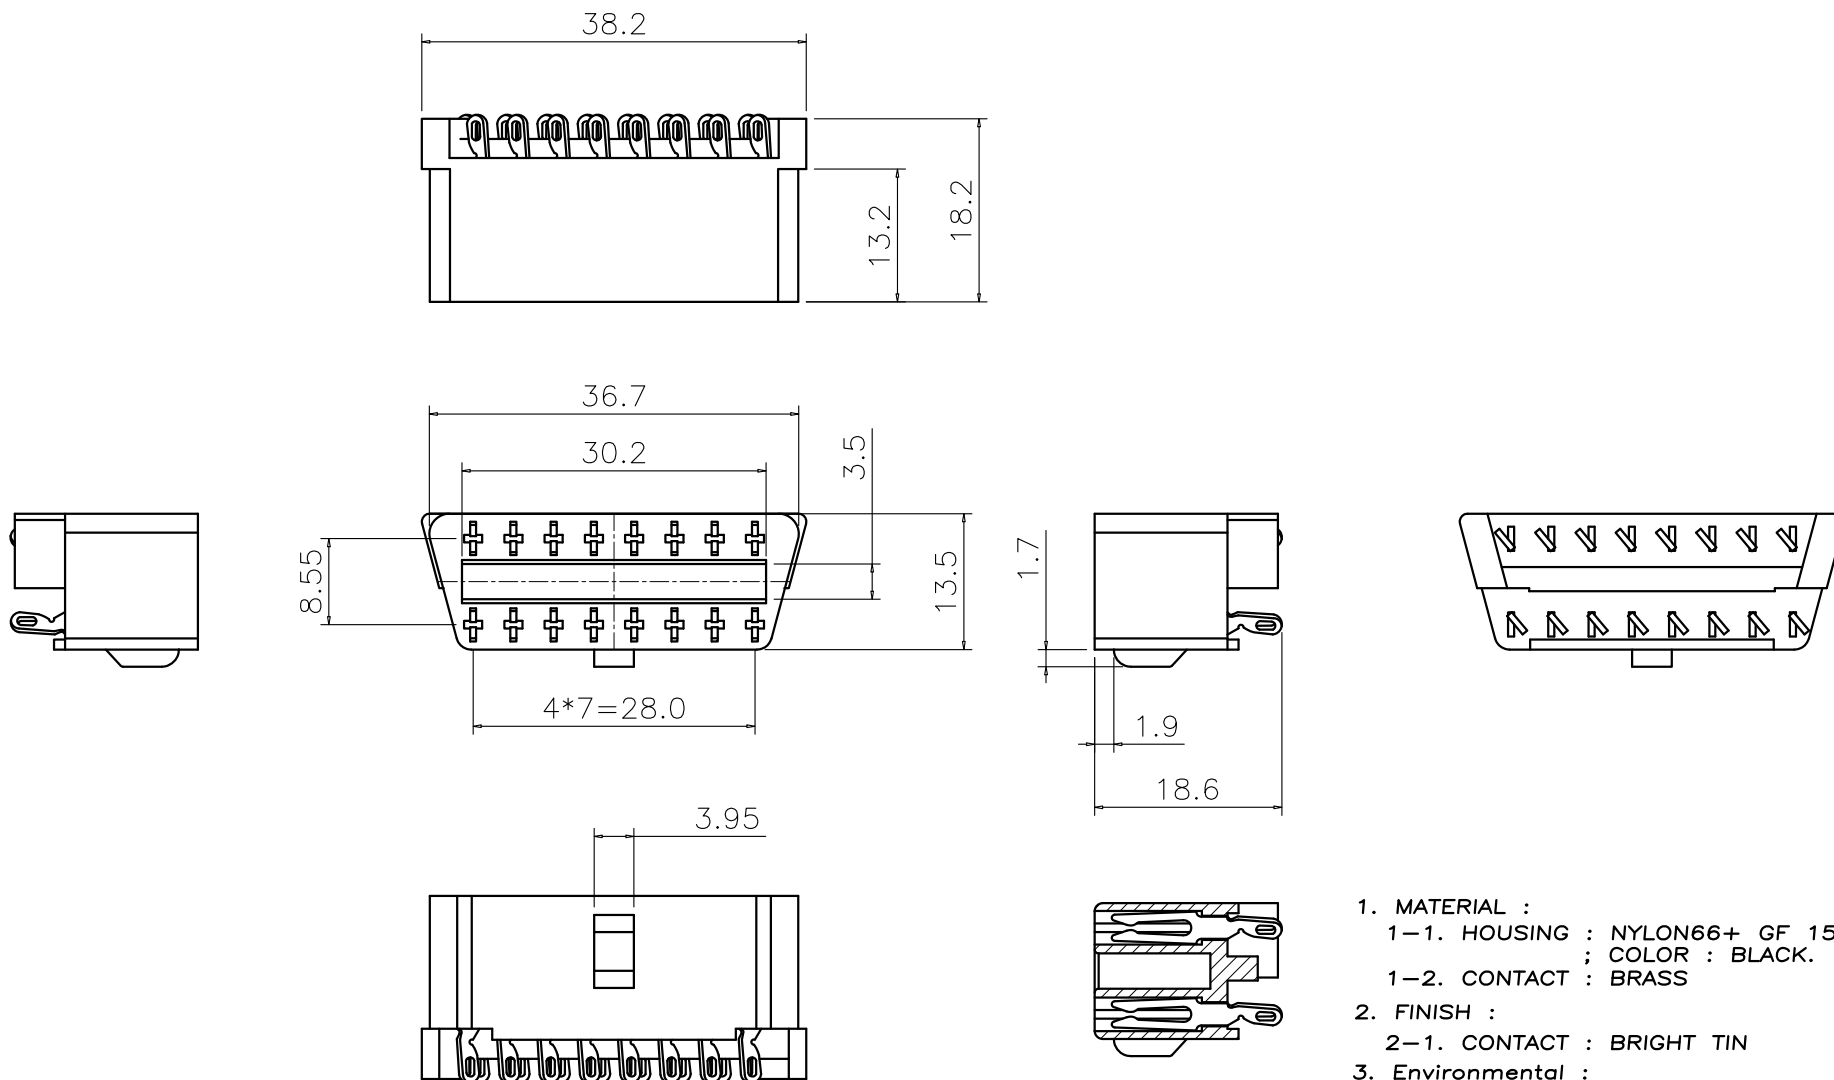

1. MATERIAL :
 - 1-1. HOUSING : NYLON66+ GF 15% UL94V-0 ; COLOR : BLACK.
 - 1-2. CONTACT : BRASS
2. FINISH :
 - 2-1. CONTACT : BRIGHT TIN
3. Environmental :
 - 3-1. Operation Temperature : -20℃~85℃

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

OBD2-SS-16-LF

SERIES T LEADFREE
16WAY
SOLDER
FEMALE

DESCRIPTION: OBD2 16POS RECEPTACLE(INSET),MOLDING TYPE