

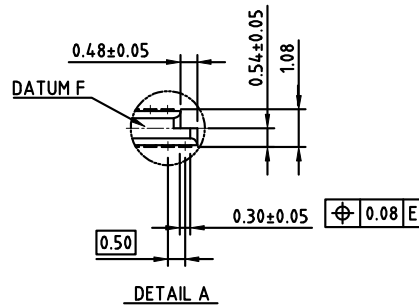
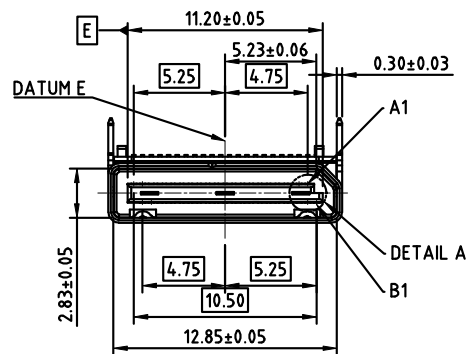


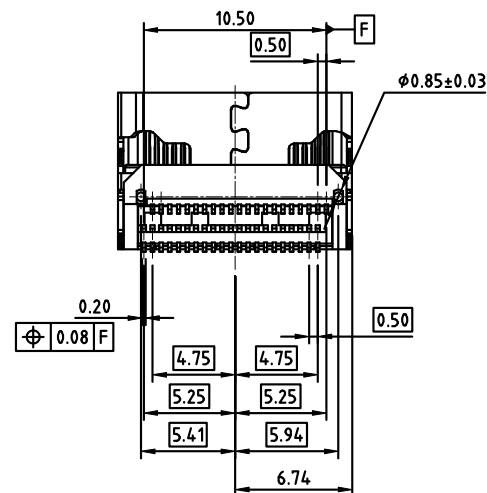


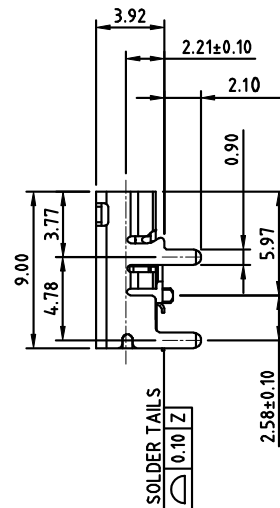

- NOTES:
- MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMPERATURE, UL94V-0; COLOR: BLACK
 - 1.2 CONTACT: COPPER ALLOY.
 - 1.3 SHELL: STAINLESS STEEL.
 - FINISH:
 - 2.1 CONTACT:
 - 50u" MIN. NICKEL PLATING OVERALL.
 - 15u" or 30u" MIN. GOLD ON CONTACT AREA.
 - G/F PLATING ON SOLDER TAIL.
 - 2.2 SHELL:
 - 50u" MIN. NICKEL PLATING OVERALL.

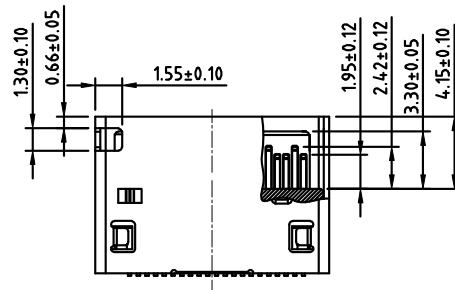

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±



PPOJECTION

照片框

ORDER INFORMATION

OCU-SWMPM-42-LF
SERIES | | | | LEADFREE
| | | | 42 WAY
| | | | METAL FOOT
| | | | POST
FEMALE | | | METAL FOOT
90° SMT

DESCRIPTION:

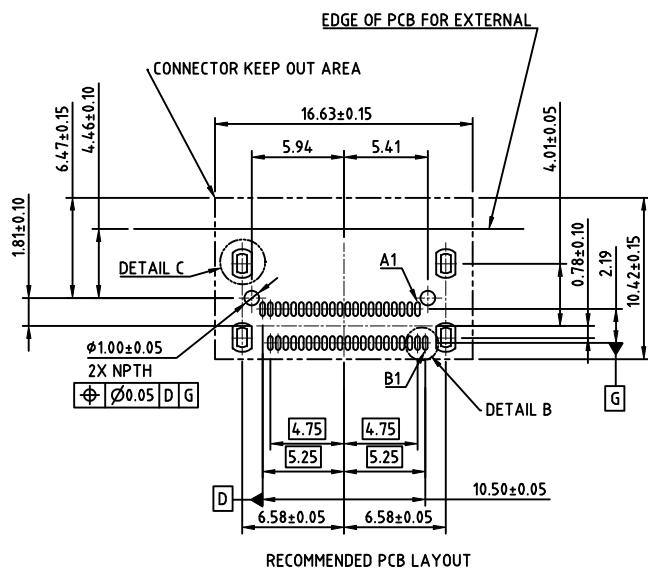


PINOUT FOR x4 FIXED INTERNAL CONNECTORS (root)(Downstream)

PIN#	DESCRIPTION	PIN#	DESCRIPTION
ROW OFFSET - NO PIN THIS SIDE		B1	RESERVED
A1	POWER 3.3Vact RX	B2	GROUND
A2	GROUND	B3	PETp0
A3	PERp0	B4	PETn0
A4	PERn0	B5	GROUND
A5	GROUND	B6	PETp1
A6	PERp1	B7	PETn1
A7	PERn1	B8	GROUND
A8	GROUND	B9	2-WIRE CLOCK
A9	BP TYPE	B10	2-WIRE DATA
A10	CWAKE#	B11	GROUND
A11	GROUND	B12	PERST#
A12	VSP	B13	CPRSNT#
A13	VSP	B14	GROUND
A14	GROUND	B15	PETp2
A15	PERp2	B16	PETn2
A16	PERn2	B17	GROUND
A17	GROUND	B18	PETp3
A18	PERp3	B19	PETn3
A19	PERn3	B20	GROUND
A20	GROUND	B21	POWER 3.3Vact TX
A21	RESERVED	ROW OFFSET - NO PIN THIS SIDE	

PINOUT FOR x4 FIXED INTERNAL CONNECTORS (end point)(Upstream)

PIN#	DESCRIPTION	PIN#	DESCRIPTION
ROW OFFSET - NO PIN THIS SIDE		B1	RESERVED
A1	POWER 3.3Vact RX	B2	GROUND
A2	GROUND	B3	PETp0
A3	PERp0	B4	PETn0
A4	PERn0	B5	GROUND
A5	GROUND	B6	PETp1
A6	PERp1	B7	PETn1
A7	PERn1	B8	GROUND
A8	GROUND	B9	BP TYPE
A9	2-WIRE CLOCK	B10	CWAKE#
A10	2-WIRE DATA	B11	GROUND
A11	GROUND	B12	VSP
A12	PERST#	B13	VSP
A13	CPRSNT#	B14	GROUND
A14	GROUND	B15	PETp2
A15	PERp2	B16	PETn2
A16	PERn2	B17	GROUND
A17	GROUND	B18	PETp3
A18	PERp3	B19	PETn3
A19	PERn3	B20	GROUND
A20	GROUND	B21	POWER 3.3Vact TX
A21	RESERVED	ROW OFFSET - NO PIN THIS SIDE	

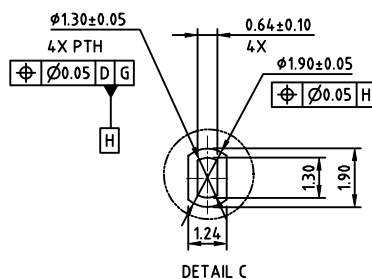

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

OCU-SWMPM-42-LF
SERIES
LEADFREE
42 WAY
METAL FOOT
POST
METAL FOOT
90° SMT
FEMALE

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com