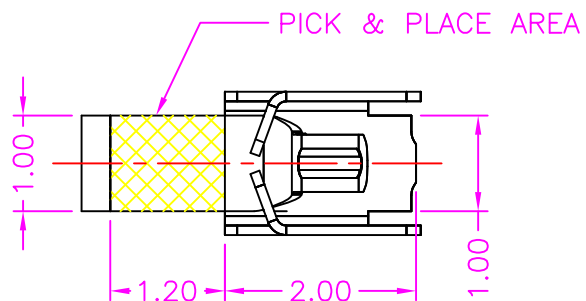






MATERIALS

TERMINAL: STAINLESS STEEL, GOLD PLATING

SPECIFICATION

CONTACT RESISTANCE: 50m OHMS MAX

OPERATION TEMPERATURE: -20°C~+65°C

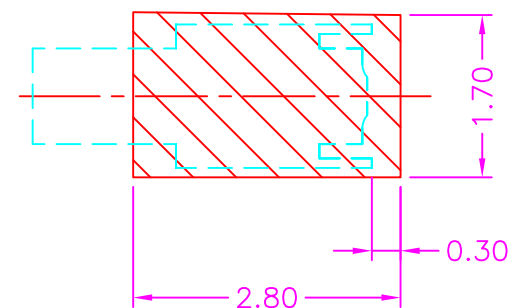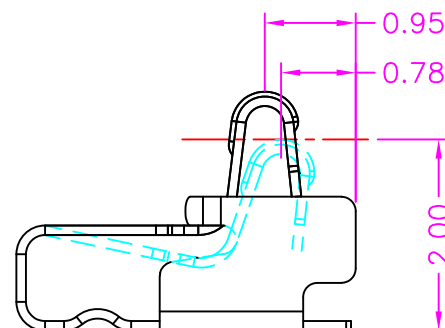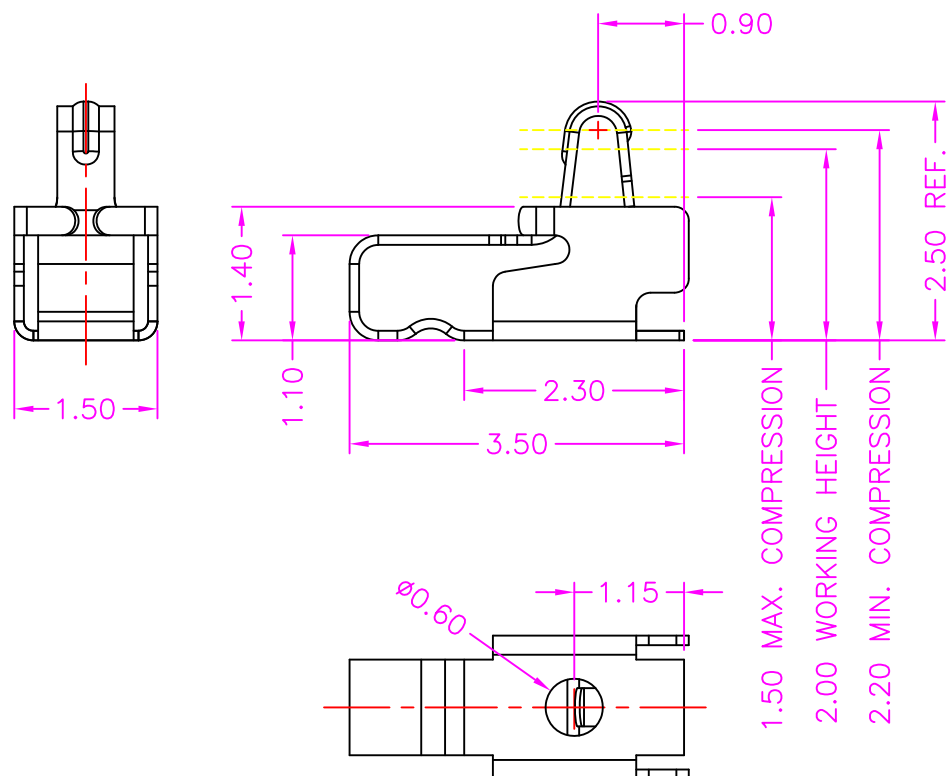

P.C.B LAYOUT
TOP VIEW ± 0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

OGT-VX-351525-LF

SERIES
LEADFREE
HIGH 2.5mm
WIDTH 1.5mm
LONG 3.5mm
NON POST
180°SMT

DESCRIPTION: SMT ANTENNA SPRING TERMINAL, H=2.50mm