
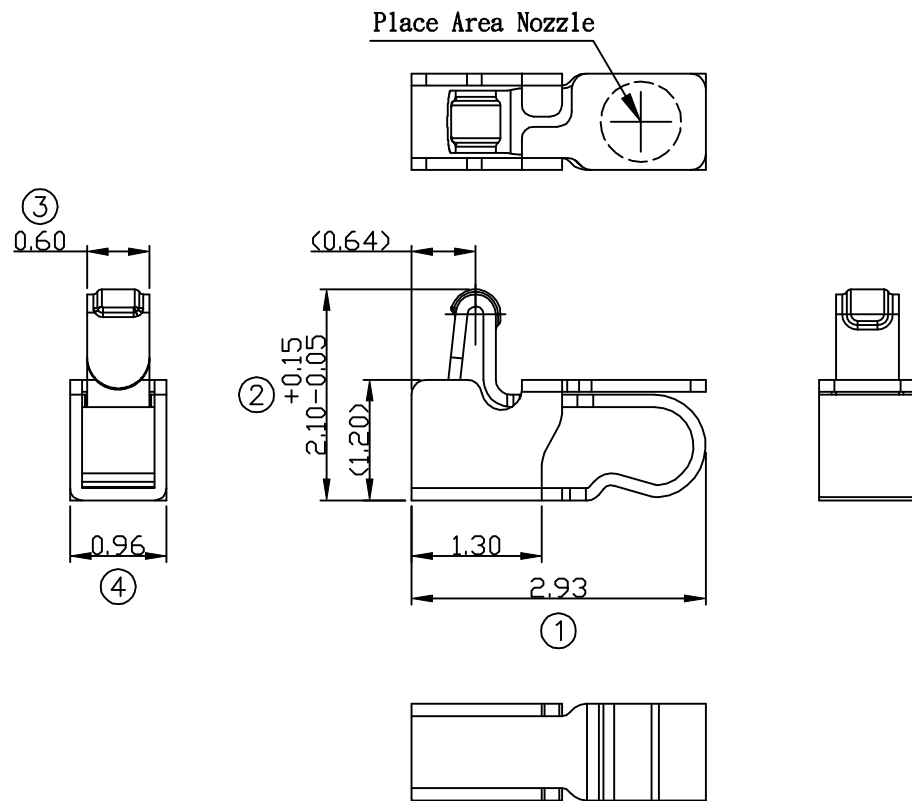



RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)

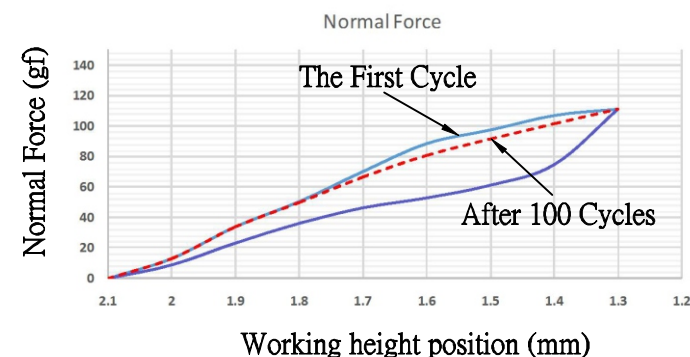

Note:

1. Material: Titanium copper Thickness 0.12mm
2. Electroplate:
 - Gold Flash on contact area
 - Gold Flash on solder area
 - Nickel underplating over all
3. Electrical Characteristics:
 - 3-1 Current Voltage: 12V
 - 3-2 Current Rate: 3A
 - 3-3 Contact Resistance: Normal Compression<30mΩ
4. Working Height of Application: 1.30~1.70 mm
5. Spring Force Tolerance is ±20gf
6. Operating Temperature: -20℃~+85℃



照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4


PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

OGT-VXR-290921-LF
SERIES REEL LEADFREE
2.93x0.96x2.10
NON POST
180°SMT

DESCRIPTION:

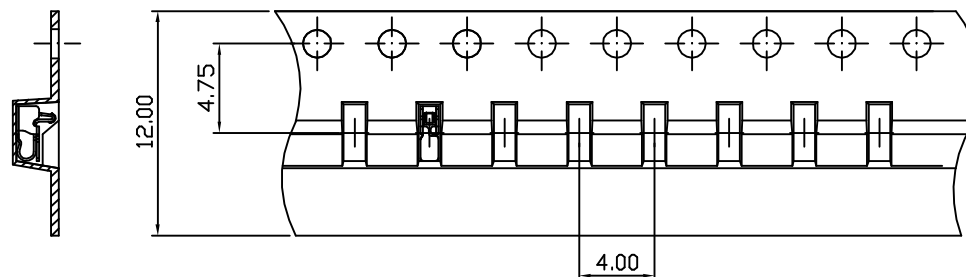


Side View

FEEDING DIRECTION



Front View

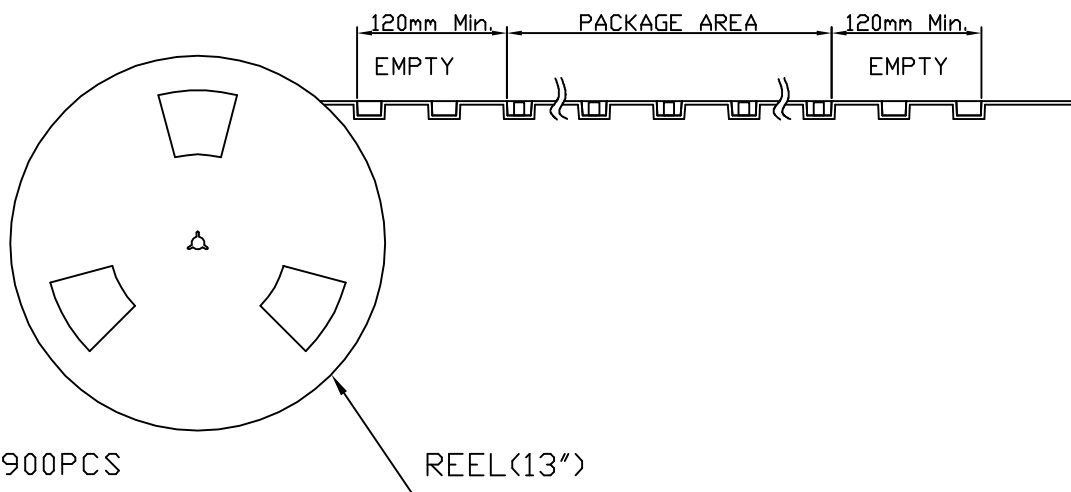

Package Information:

- 1.Quantity Per Reel: 6900PCS
- 2.REEL: 13"X 12 mm

REEL(13")

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

OGT-VXR-290921-LF

SERIES

LEADFREE

2.93x0.96x2.10

REEL

NON POST

180°SMT

DESCRIPTION: