
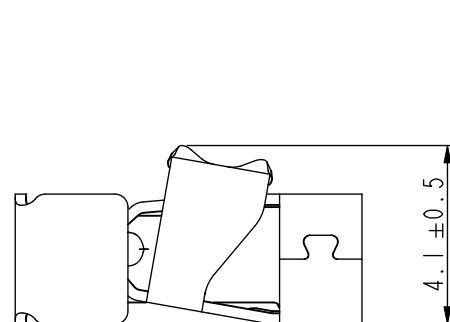

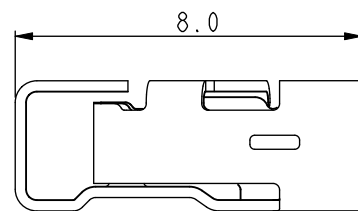


TOLERANCE: ± 0.05
RECOMMENDED P.C.B. Layout
 TOP VIEW



NOTES

1. APPLICABLE WIRE RANGE: AWG #18~AWG #26
2. INSULATION O.D.: $\varnothing 2.30\text{mm}(\text{Max.})$

I	CONTACT	PHOSPHOR BRONZE, $t=0.25\text{mm}$	(1) TIN PLATED OVER NICKEL
INDEX	PART NAME	MATERIAL	FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
 .X ± 0.35
 .XX ± 0.25
 .XXX $\pm$
 ANG $\pm 5^\circ$

PPOJECTION

照片框

ORDER INFORMATION

OGT-WX-303080-LF
 SERIES | | | | LEADFREE
 LONG 8.0mm
 WIDTH 3.0mm
 HIGH 3.0mm
 NON POST
 90°SMT

DESCRIPTION: WIRE TO BOARD, POKE-IN CONTACT SIZE 3.0mm, RIGHT ANGLE, SMT TYPE