
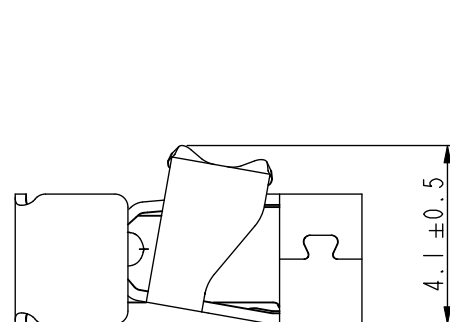

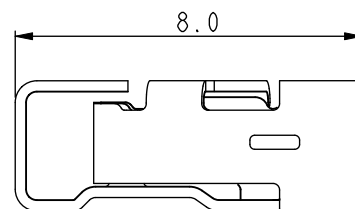


TOLERANCE:  $\pm 0.05$   
 RECOMMENDED P.C.B. Layout  
 TOP VIEW



#### NOTES

1. APPLICABLE WIRE RANGE: AWG #18~AWG #26
2. INSULATION O.D.:  $\varnothing 2.30\text{mm}(\text{Max.})$

| I     | CONTACT   | PHOSPHOR BRONZE, $t=0.25\text{mm}$ | (1) TIN PLATED OVER NICKEL |
|-------|-----------|------------------------------------|----------------------------|
| INDEX | PART NAME | MATERIAL                           | FINISH                     |

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X,  $\pm$   
 .X  $\pm 0.35$   
 .XX  $\pm 0.25$   
 .XXX  $\pm$   
 ANG  $\pm 5^\circ$


PPOJECTION

照片框

#### ORDER INFORMATION

OGT-WXR-303080-LF  
 SERIES  
 90°SMT  
 REEL  
 NON POST  
 LEADFREE  
 LONG 8.0mm  
 WIDTH 3.0mm  
 HIGH 3.0mm

DESCRIPTION: WIRE TO BOARD, POKE-IN CONTACT SIZE 3.0mm, RIGHT ANGLE, SMT TYPE

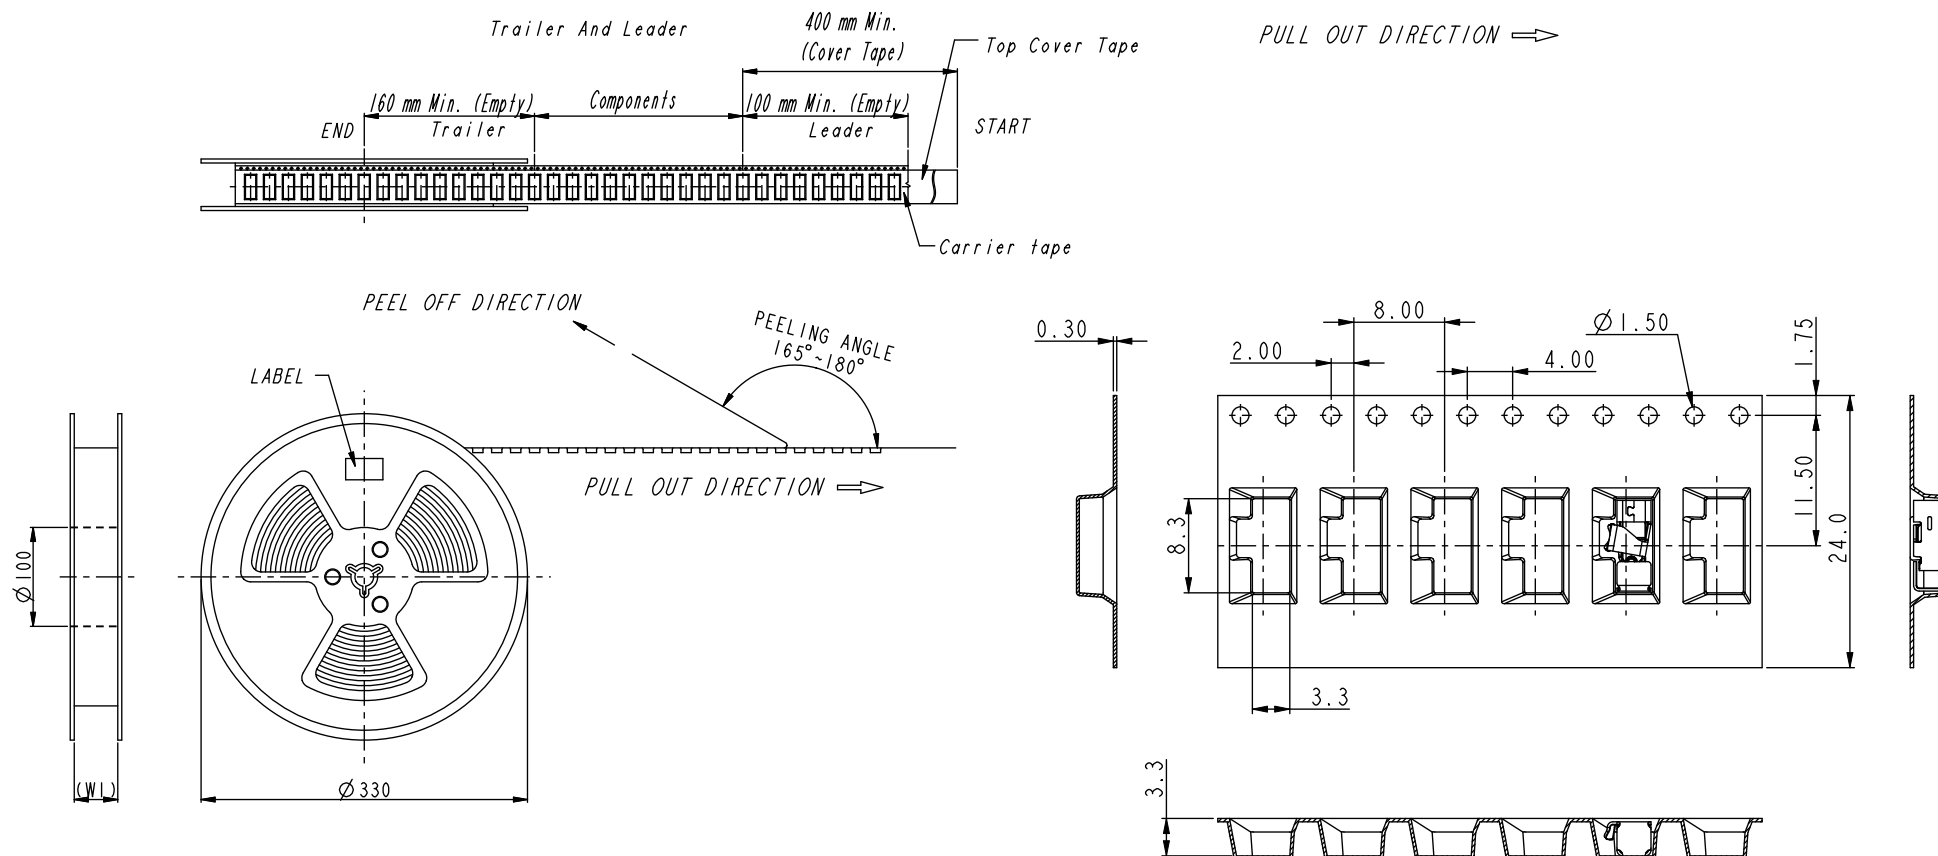

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.20$
2. CARRIER CAMBER IS WITHIN 1 mm IN 250 mm
3. THE TOTAL TEARING CONTROL RANGE OF TOP COVER TAPE IS 10~130g, REFERENCE SPEC: EIA-481-D
4. PEELING SPEED: 300mm/MINUTES, REFERENCE SPEC: EIA-481-D
5. MATERIAL: TRANSPARENT CONDUCTIVE POLYSTYRENE ALLOY.(UP-5000)
6. ALL DIMENSIONS MEET EIA-481-D REQUIREMENTS
7. THICKNESS :  $0.30 \pm 0.05$ mm

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X,  $\pm$   
.X  $\pm 0.35$   
.XX  $\pm 0.25$   
.XXX  $\pm$   
ANG  $\pm 5^\circ$


PPOJECTION

照片框




**ORDER INFORMATION**

OGT-WXR-303080-LF  
SERIES T T T T T LEADFREE  
LONG 8.0mm  
WIDTH 3.0mm  
HIGH 3.0mm  
90°SMT REEL  
NON POST

DESCRIPTION: WIRE TO BOARD, POKE-IN CONTACT SIZE 3.0mm, RIGHT ANGLE, SMT TYPE

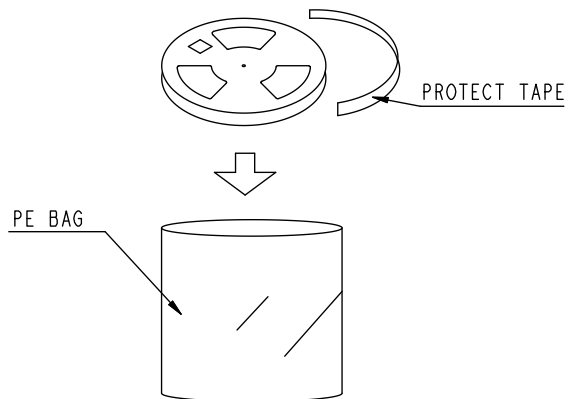

| PIN, Q'TY/RE | REEL DIM.(mm)                  | PIN, RE/BC, PCS/BC   | CARTON DIM.(mm) |
|--------------|--------------------------------|----------------------|-----------------|
| 2400 PCS/RE  | $\varnothing 330*(24.0\pm0.5)$ | 10 RE, 24,000 PCS/BC | 350*350*340     |

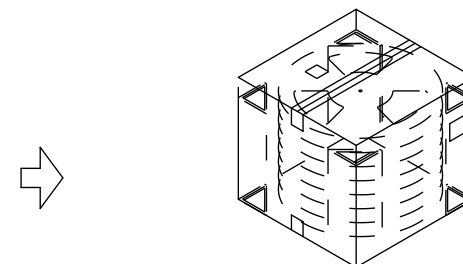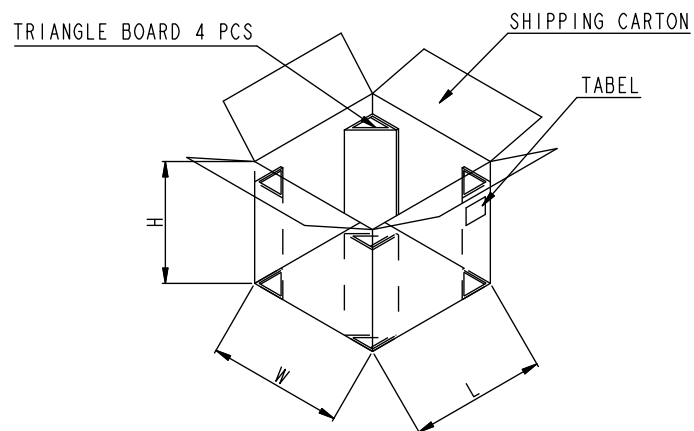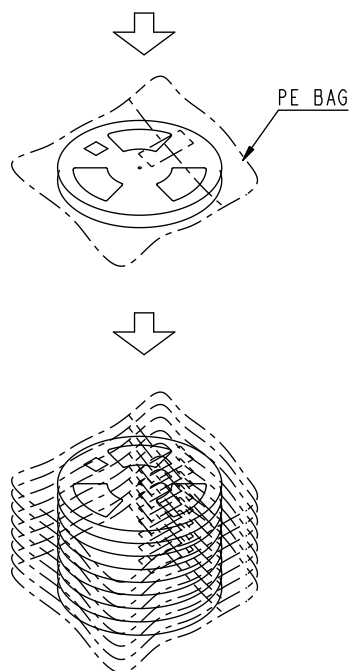

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X,  $\pm$   
.X  $\pm 0.35$   
.XX  $\pm 0.25$   
.XXX  $\pm$   
ANG  $\pm 5^\circ$

PPOJECTION

照片框

**ORDER INFORMATION**

OGT-WXR-303080-LF  
SERIES  
90°SMT  
REEL  
NON POST  
LEADFREE  
LONG 8.0mm  
WIDTH 3.0mm  
HIGH 3.0mm

DESCRIPTION: WIRE TO BOARD, POKE-IN CONTACT SIZE 3.0mm, RIGHT ANGLE, SMT TYPE