
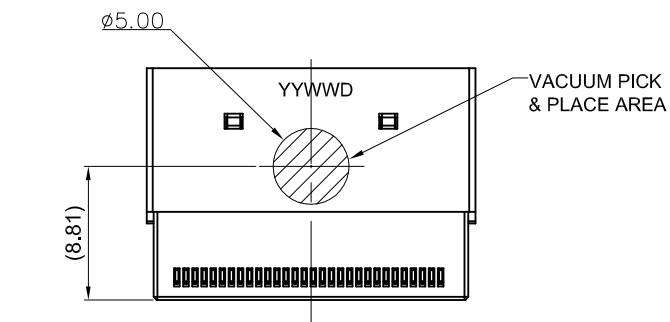
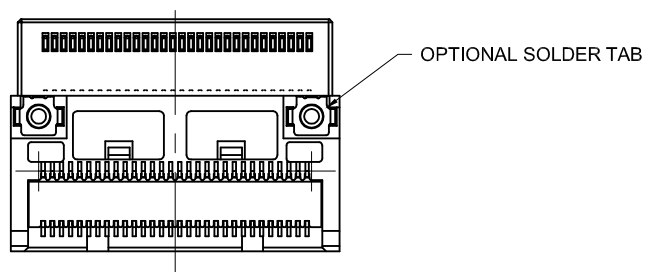
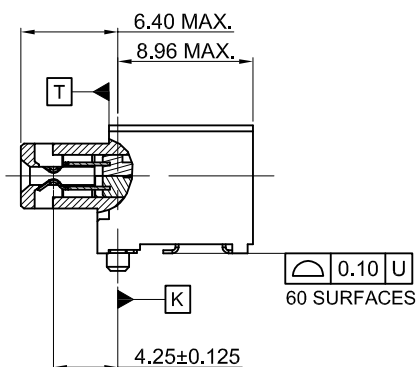


NOTE:

1. MATERIAL:
HOUSING: HIGH TEMP THERMOPLASTIC, UL94 V-0,BLACK.
CONTACT: COPPER ALLOY.
SOLDER TAB : COPPER ALLOY.
2. FINISH:
CONTACT: CONTACT AREA SEE P/N DESCRIPTION,
50u" MIN. NICKEL UNDERPLATE ALL OVER.
SOLDER TAB : 50u" MIN. NICKEL UNDERPLATE ALL OVER
100u" MIN. Tin ALL OVER
3. THIS PART MEETS THE RESTRICTION OF HAZARDOUS
SUBSTANCES IN ELECTRICAL AND ELECTRONIC
EQUIPMENT (ROHS) DIRECTIVE (2011/65/EU).

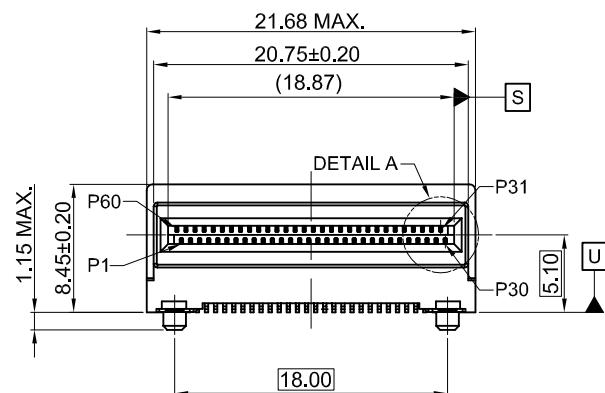

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.15
.XXX $\pm$ 0.05
ANG $\pm$ 2°

PPOJECTION


照片框

ORDER INFORMATION


OSFP-SWP-060-LF

SERIES
LEADFREE
60 WAY
POST
90°SMT
FEMALE

DESCRIPTION: OSFP CONNECTOR

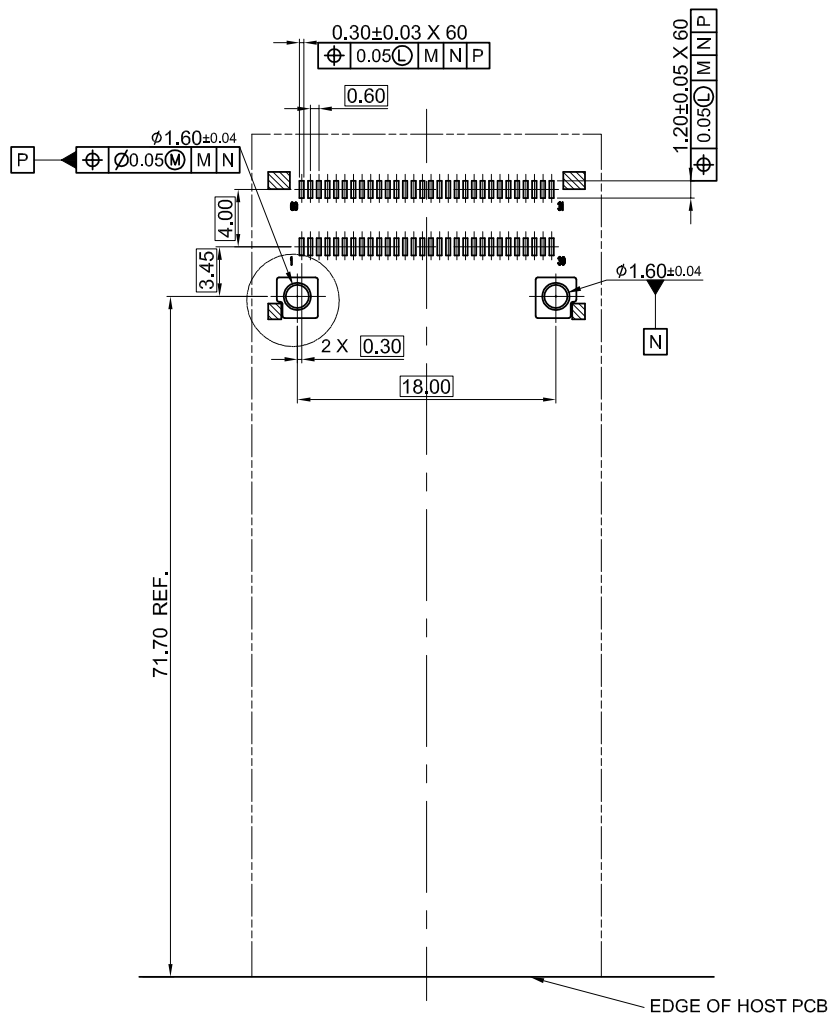

MOTHERBOARD FOOTPRINT RECOMMENDATION

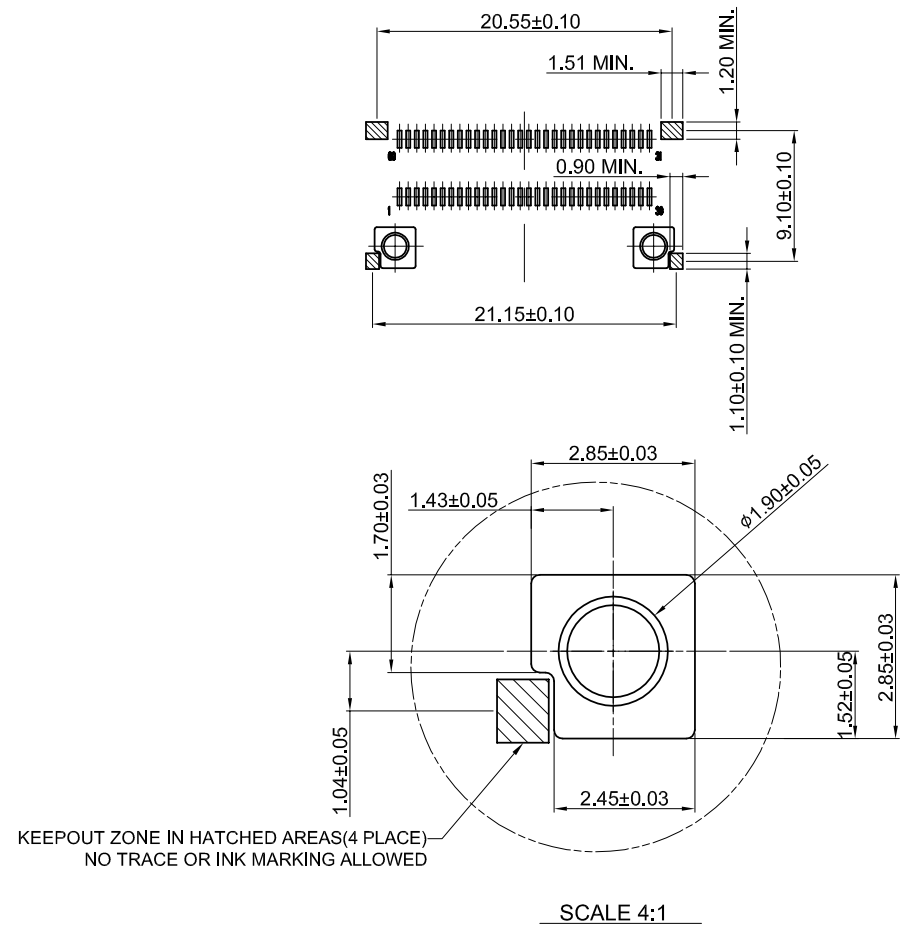

() For SIP

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.05
 ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

OSFP-SWP-060-LF

SERIES T T T LEADFREE
 60 WAY
 POST
 90°SMT
 FEMALE

DESCRIPTION: OSFP CONNECTOR