
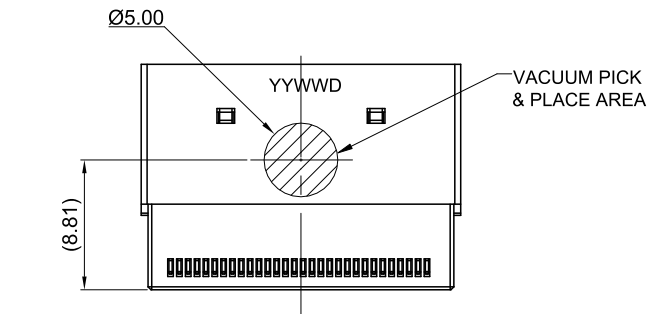
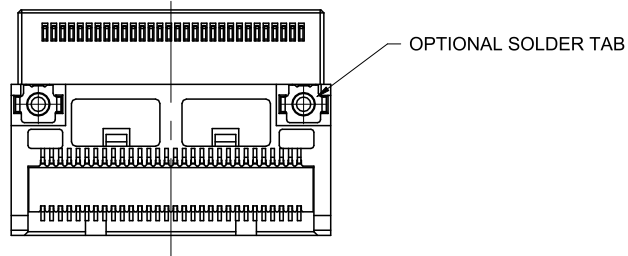
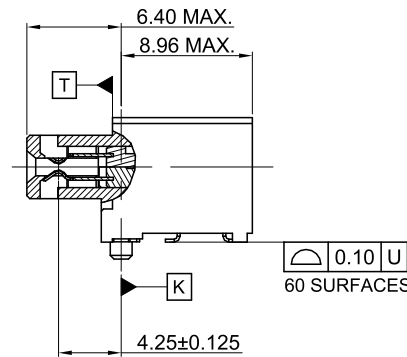


NOTE:

1. MATERIAL:
HOUSING: HIGH TEMP THERMOPLASTIC, UL94 V-0, BLACK.
CONTACT: COPPER ALLOY.
SOLDER TAB : COPPER ALLOY.
2. FINISH:
CONTACT: CONTACT AREA SEE P/N DESCRIPTION,
50u" MIN. NICKEL UNDERPLATE ALL OVER.
SOLDER TAB : 50u" MIN. NICKEL UNDERPLATE ALL OVER
100u" MIN. Tin ALL OVER
3. THIS PART MEETS THE RESTRICTION OF HAZARDOUS
SUBSTANCES IN ELECTRICAL AND ELECTRONIC
EQUIPMENT (ROHS) DIRECTIVE (2011/65/EU).

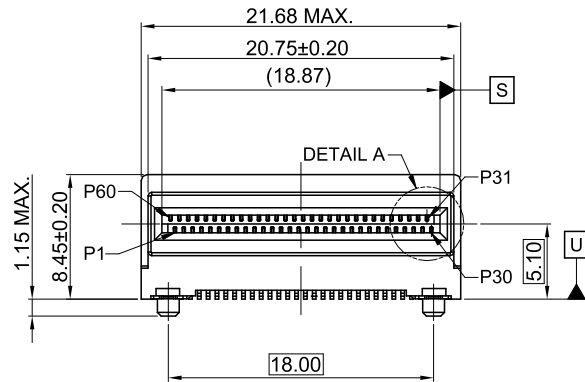

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION


照片框

ORDER INFORMATION


OSFP-SWPR-060-LF

SERIES
LEADFREE
60 WAY
REEL
POST
90°SMT
FEMALE

DESCRIPTION: OSFP CONNECTOR

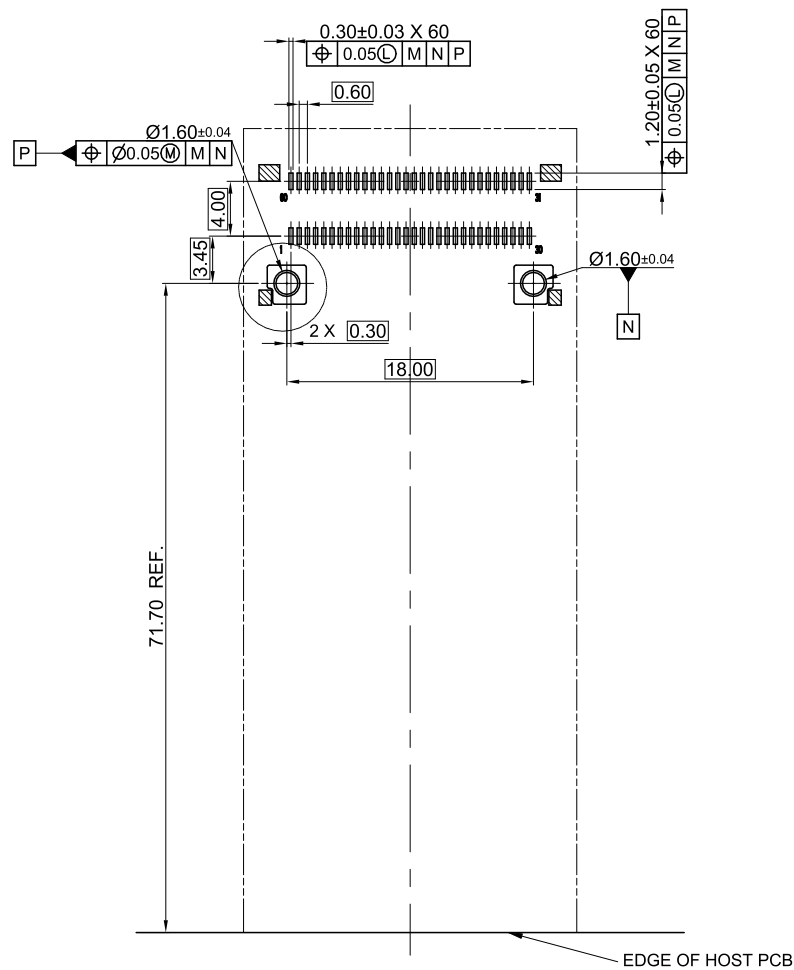

MOTHERBOARD FOOTPRINT RECOMMENDATION

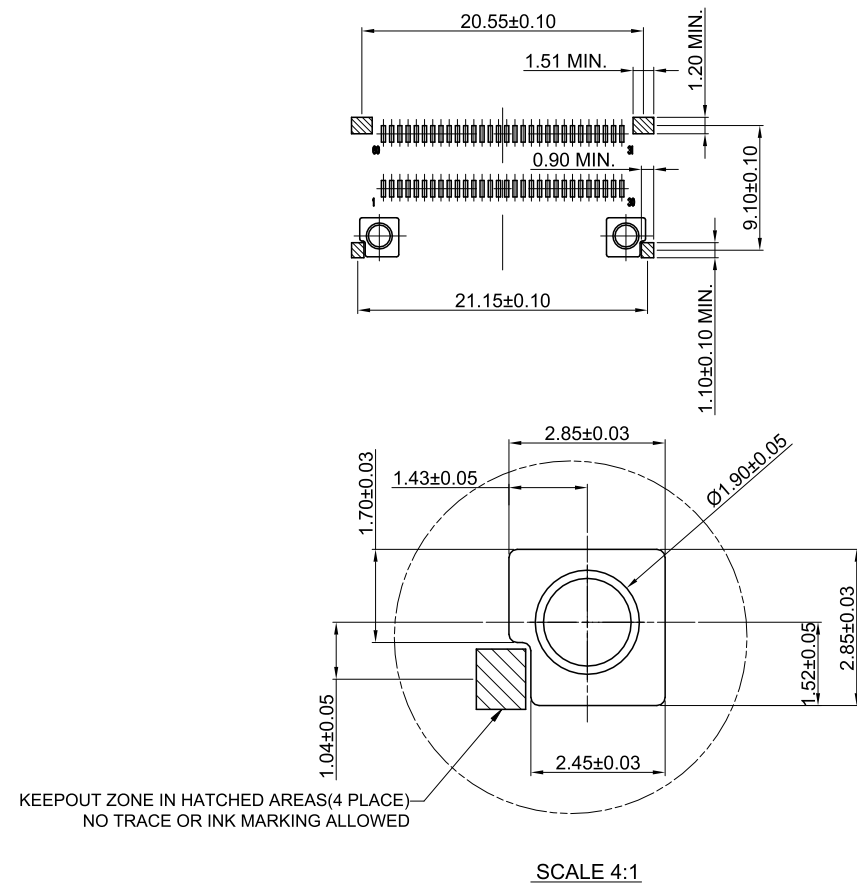

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION


照片框

ORDER INFORMATION

OSFP-SWPR-060-LF

SERIES T T T T LEADFREE
60 WAY
REEL
POST
90°SMT
FEMALE

DESCRIPTION: OSFP CONNECTOR

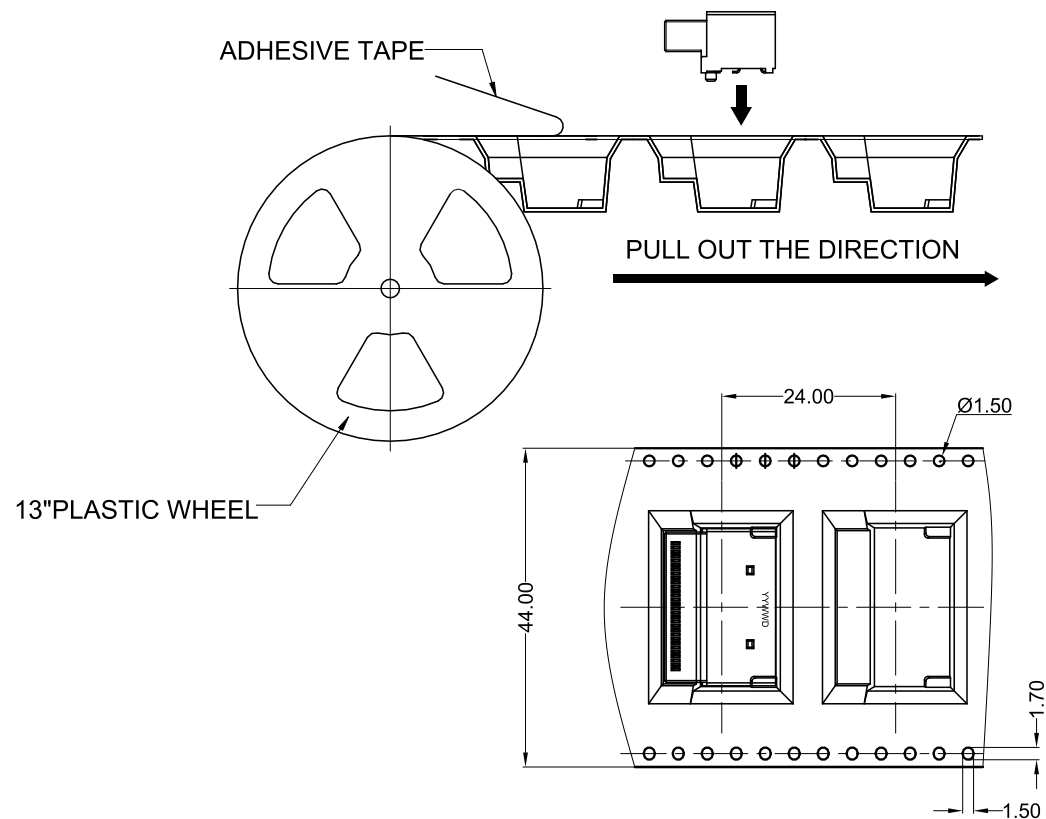

SCALE 1 : 2

PACKAGING CAPACITY		
PCS/PACKAGING	PACKAGING/BOX	PCS/BOX
250	3	750

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

OSFP-SWPR-060-LF

SERIES
LEADFREE
60 WAY
REEL
POST
90°SMT
FEMALE

DESCRIPTION: OSFP CONNECTOR