

MATERIAL

Insulator : NYLON 6T

Contact Pin : Brass




SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Operation Temperature : -55°C to + 105°C

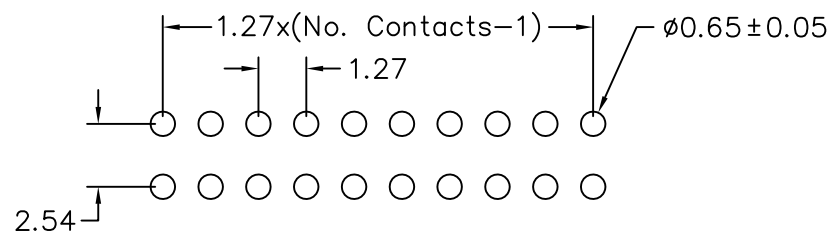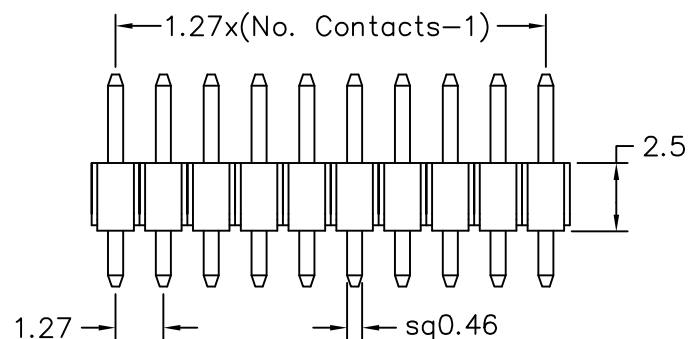

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

照片框

ORDER INFORMATION

P-D252820-2Xxx-LF
SERIES | 2X02:04WAY | LEADFREE
DIP180° | 2X50:100WAY
DIP 2.0mm
CONTACT 2.8mm
BASE 2.5mm

DESCRIPTION: PIN HEADER 1.27*2.54mm STRAIGHT TYPE, DUAL ROWS