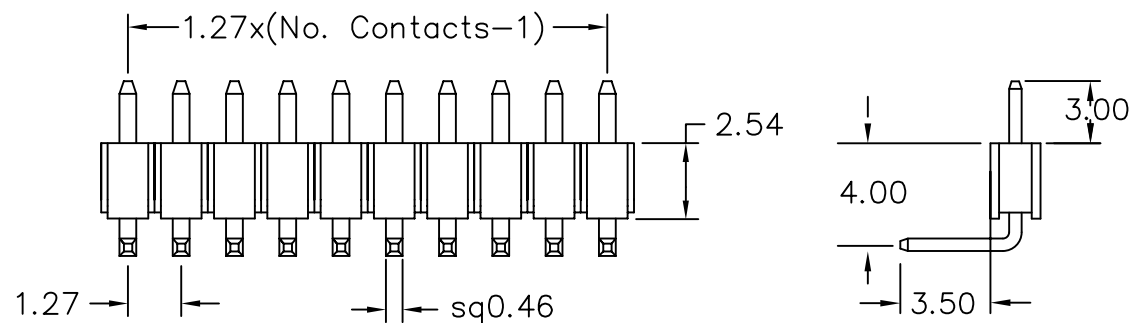
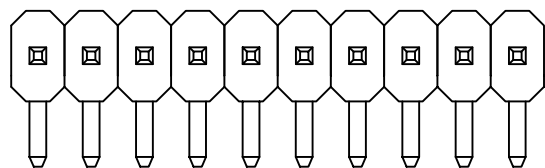


Recommended P.C.B Layout

MATERIAL

Insulator : NYLON 6T

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Operation Temperature : -55°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

P-R25153035-1Xxx-LF
SERIES
DIP 90°
BASE 2.54mm
R/A 1.5mm
LEADFREE
1X02:02WAY
1X50:50WAY
DIP 3.5mm
CONTACT 3.0mm

DESCRIPTION: PIN HEADER 1.27*2.54mm RIGHT ANGLE TYPE