

SPECIFICATIONS




Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper alloy
 Insulator Material: Polyester,UL 94V-0
 ◎Standard: Nylon-6T

Finish: Tin,Gold or Duplex plated

◎Standard: Duplex plated

◎Note:

Duplex plating: gold plated on contact area,
 Tin on solder area

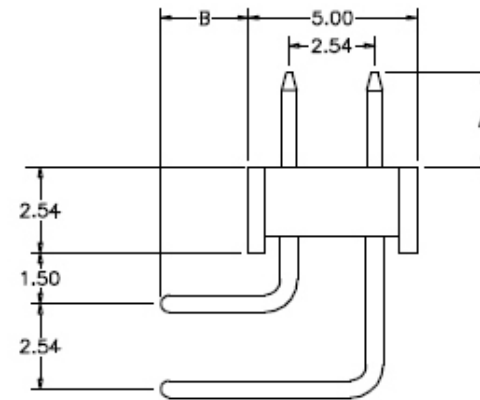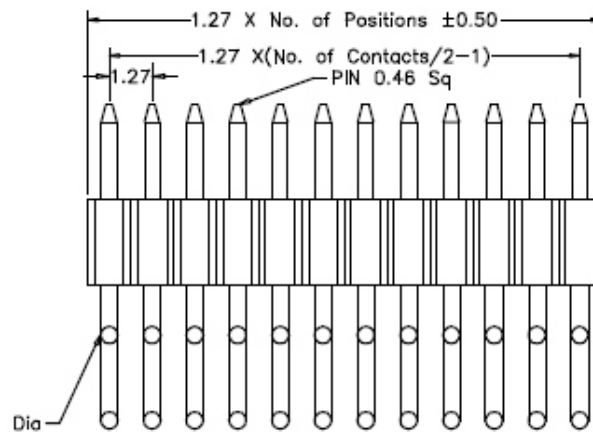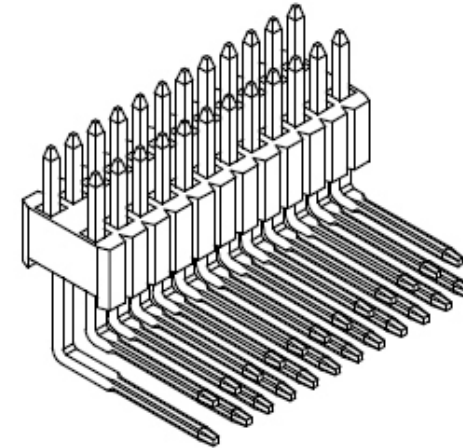

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

P-R25156026SG-2Xxx-LF
 SERIES
 DIP 90°
 BASE 2.50mm
 R/A 1.5mm
 CONTACT 6.0mm
 LEADFREE
 1X02:02WAY
 1X50:50WAY
 SEMI GOLD
 DIP 2.6mm

DESCRIPTION: