

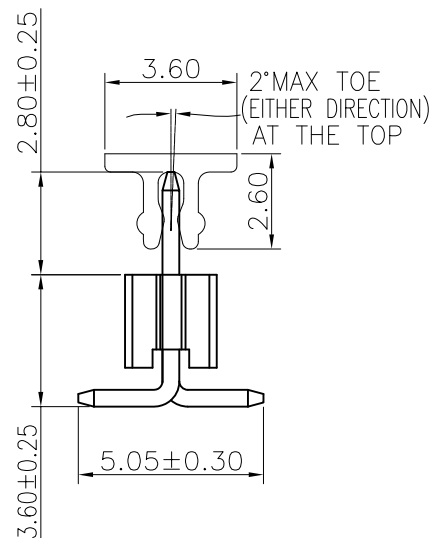
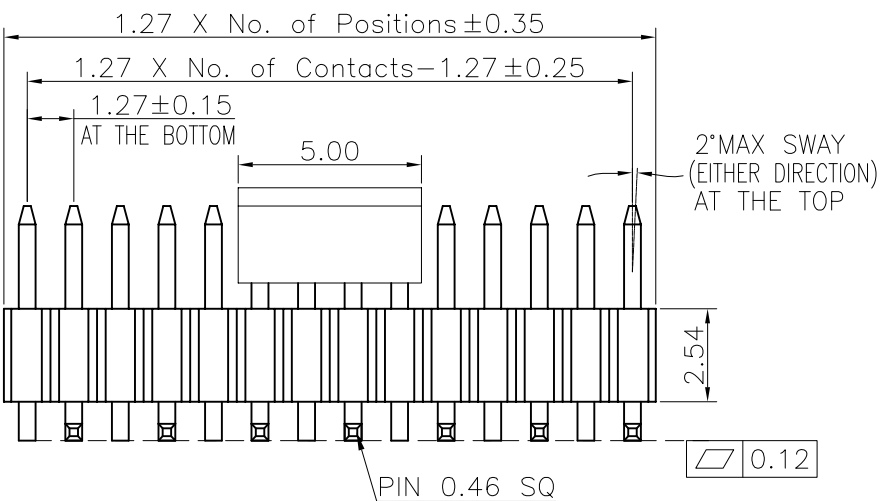


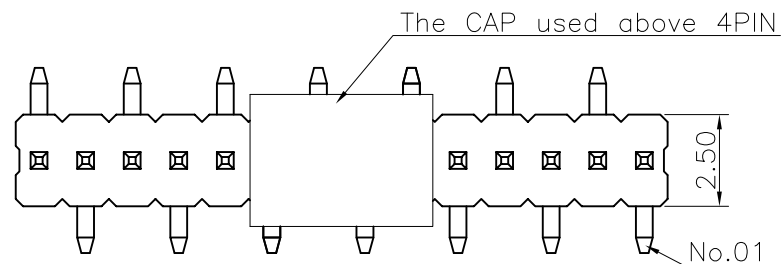

Specifications
 Current Rating:1.0Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:300VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Brass
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

Recommended P.C.Board Layout
 (Tolerance:±0.05)

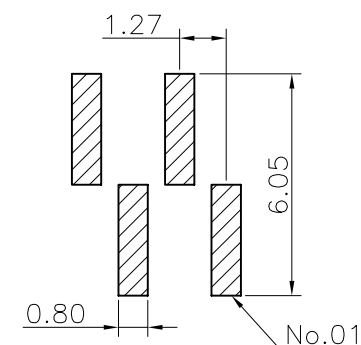

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

P-V36X28C-1XxxR-LF
 SERIES HIGH 3.6mm NON POST CAP CONTACT 2.8mm
 180°SMT
 LEADFREE
 R TYPE FOOT POSITION
 1X02:02WAY
 1X50:50WAY

DESCRIPTION:1.27 PIN HEADER SINGLE ROW SMT TYPE CONNECTOR