
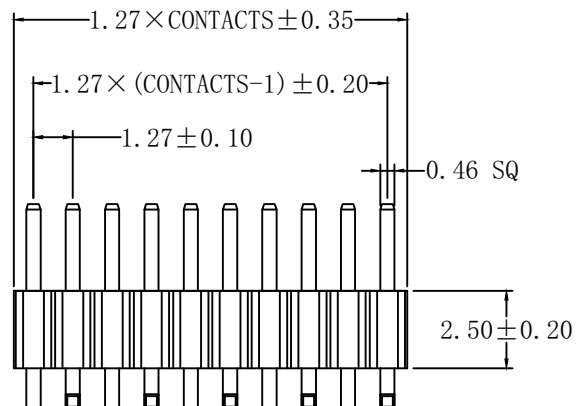
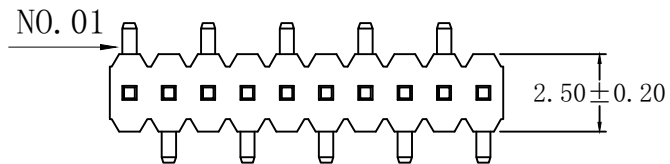


P. C. B. LAYOUT



A: 4.50 mm
B: 2.80 mm
C: 3.80 mm

MATERIAL

HOUSING : NY6T, UL-94V0
CONTACT : COPPER ALLOY
PLATED : GOLD FLASH
COLOR : BLACK

SPECIFICATION

CURRENT : 1A
OPERATING TEMPERAURE : -55° C TO +105° C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE: 1000 MEGAOHMS MIN
WITHSTAND VOLTAGE : 500 V AC/minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

P-V38X28-1XxxR-LF
SERIES | | | | LEADFREE
180°SMT | | | | R TYPE FOOT
HIGH 3.8mm | | | | 1X02:02WAY
CONTACT 2.8mm | | | | 1X50:50WAY
NON POST

DESCRIPTION: