

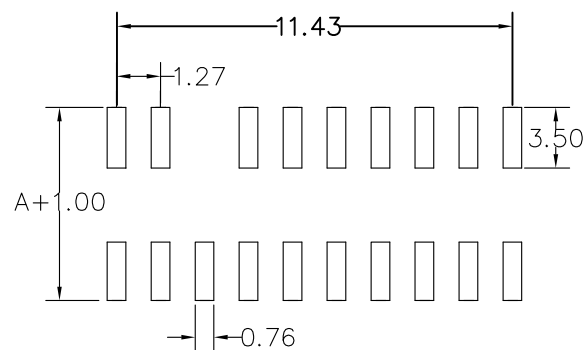
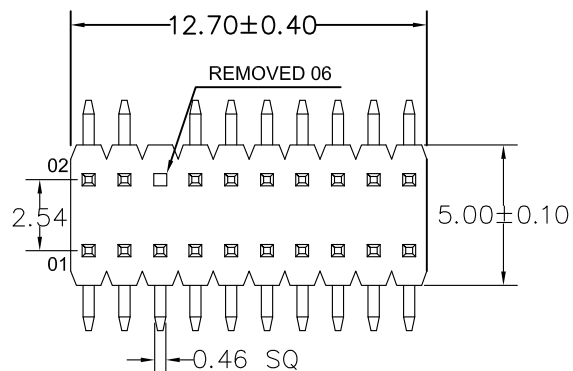


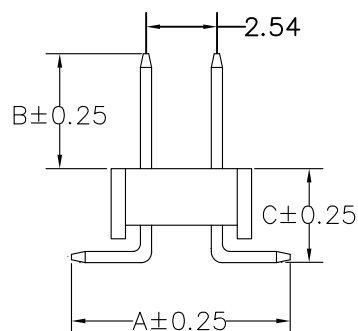

RECOMMENDED P.C.B LAYOUT

MATERIAL
 HOUSING : NYLON 6T,UL94V-0
 CONTACT : COPPER ALLOYS
 PLATED : GOLD-FLASH
 COLOR : BLACK

SPECIFICATION
 CURRENT: 1A
 OPERATING TEMPERATURE: -55°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN
 DIELECTRIC STRENGTH : 1000 VAC MIN

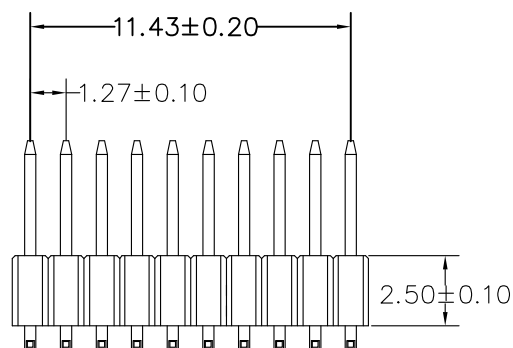

A: 7.50 mm B: 3.20 mm C: 3.80 mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

P-V38X32-2X10E6-LF
 SERIES
 180°SMT
 CONTACT 3.2mm
 NON POST
 HIGH 3.8mm
 LEADFREE
 EMPTY #6
 20 WAY

DESCRIPTION: PIN HEADER 1.27X2.54 SMT H:2.50

煜倫股份有限公司

www.morethanall.com