
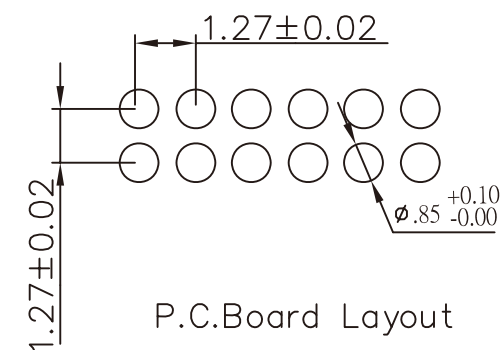
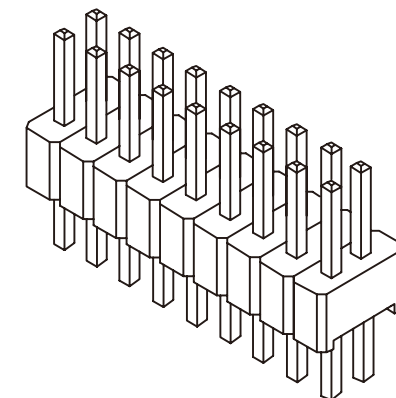
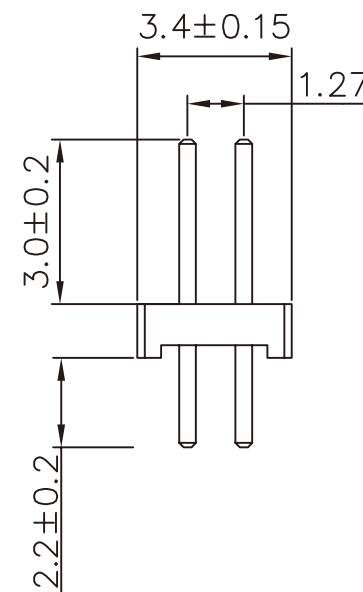


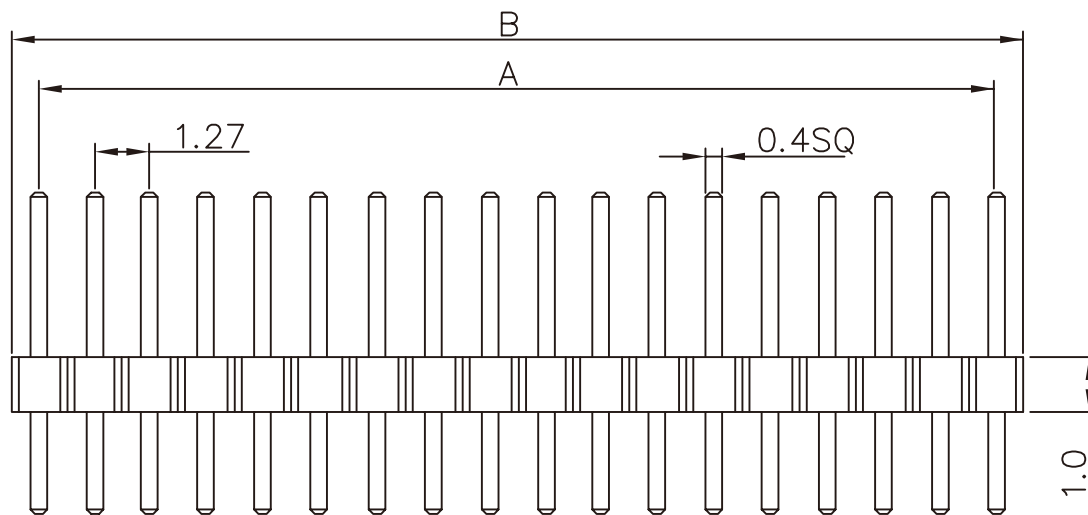

$$A = 1.27 * (\text{NO of Positions} - 1)$$

$$B = A + 1.27 \pm 0.3$$

Conteract:

Contact: Brass.

Insuiator: Nylon 6T.

Finish: Gold flash plated over nickel.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-D103022-2Xxx-LF

SERIES
DIP180°
BASE 1.0mm
LEADFREE
2X02:04WAY
2X50:100WAY
DIP 2.2mm
CONTACT 3.0mm

DESCRIPTION: