
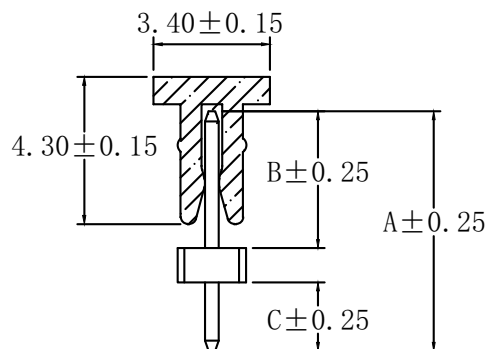
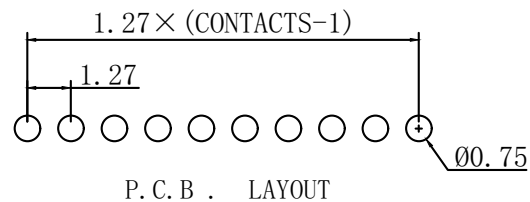
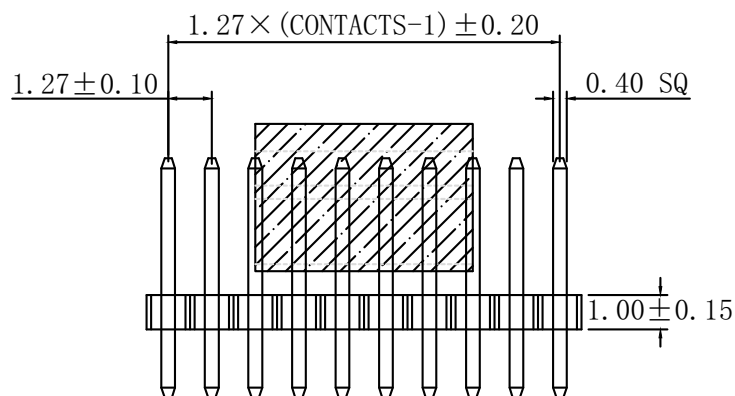


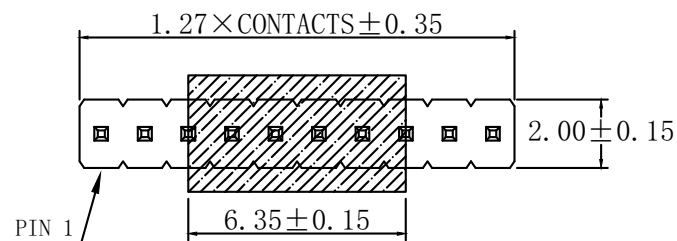

A: 6.10 mm  
B: 4.00 mm  
C: 1.10 mm

## MATERIAL

HOUSING :NY6T, UL94V-0

CAP :NY9T, UL94V-0

CONTACT :COPPER ALLOYS

PLATED :GOLD FLASH

COLOR :BLACK

## SPECIFICATION

CURRENT : 1A

OPERATING TEMPERATURE: -55° C TO +105° C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE: 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : 500 V AC/minute

| CONTACTS |      |      |      |
|----------|------|------|------|
|          | 1×12 | 1×25 | 1×38 |
|          | 1×13 | 1×26 | 1×39 |
|          | 1×14 | 1×27 | 1×40 |
| 1×02     | 1×15 | 1×28 | 1×41 |
| 1×03     | 1×16 | 1×29 | 1×42 |
| 1×04     | 1×17 | 1×30 | 1×43 |
| 1×05     | 1×18 | 1×31 | 1×44 |
| 1×06     | 1×19 | 1×32 | 1×45 |
| 1×07     | 1×20 | 1×33 | 1×46 |
| 1×08     | 1×21 | 1×34 | 1×47 |
| 1×09     | 1×22 | 1×35 | 1×48 |
| 1×10     | 1×23 | 1×36 | 1×49 |
| 1×11     | 1×24 | 1×37 | 1×50 |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±  
.X ± 0.38  
.XX ± 0.25  
.XXX ±  
ANG ± 5°

PPOJECTION

照片框

## ORDER INFORMATION

PA-D104011C-1Xxx-LF  
SERIES  
DIP 180°  
BASE 1.0mm  
LEADFREE  
1X02:02 WAY  
1X50:50 WAY  
CAP  
DIP: 1.1mm  
CONTACT 4.0mm

DESCRIPTION: 1.27PH 180° +CAP H:1.00 1\*XXPIN W:2.00