

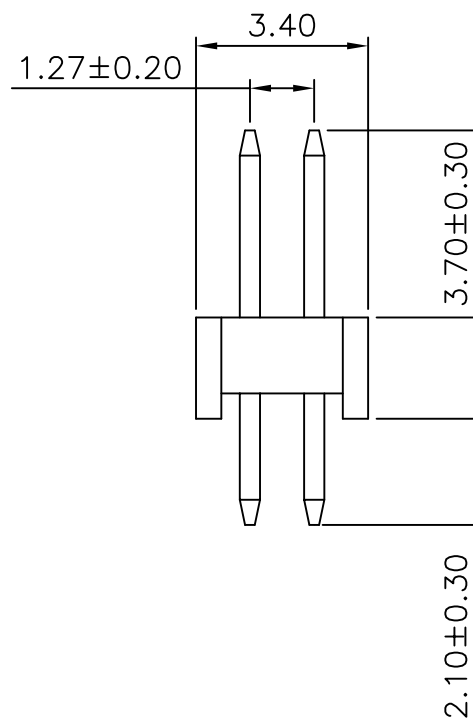
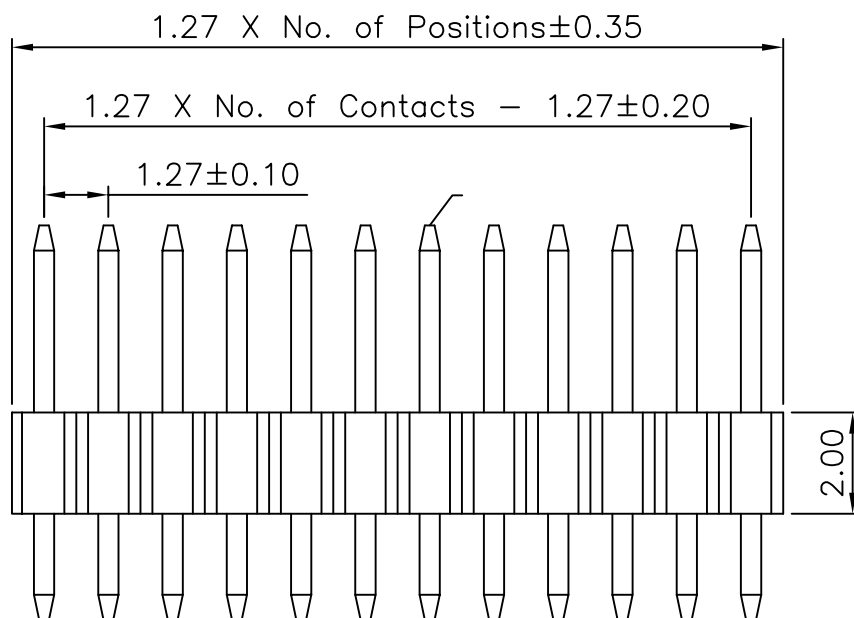


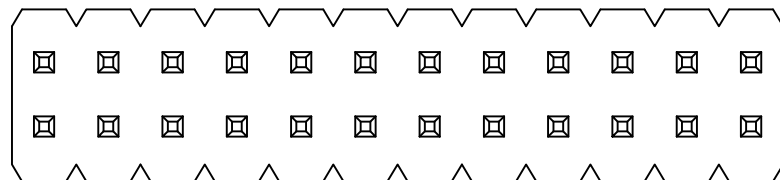

Recommended P.C.Board  
Hole Layout

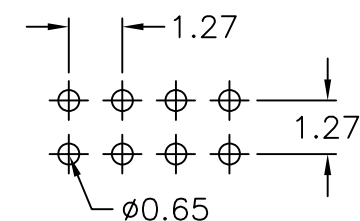

## Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

## Materials

Contact Material: Copper Alloy

Insulation Material: Polyester, UL 94V-0

Nylon-6T

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.38  
.XX ± 0.25  
.XXX ± 0.13  
ANG ±

照片框

## ORDER INFORMATION

PA-D203721-2Xxx-LF  
SERIES  
DIP180°  
BASE 2.0mm  
LEADFREE  
2X02:04WAY  
2X50:100WAY  
DIP 2.1mm  
CONTACT 3.7mm

DESCRIPTION: 1.27 PIN HEADER DIP TYPE BASE 2.0H