

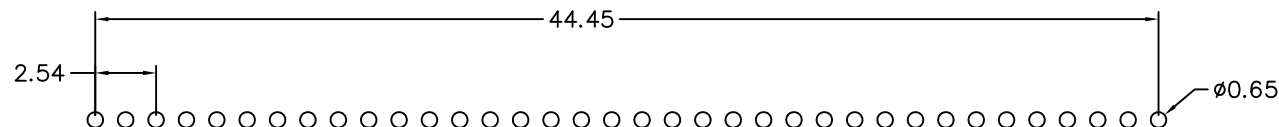




MATERIAL
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000M Ω Min. at DC 500V
Contact Resistance : 20m Ω Max. at DC 100mA
Dielectric Voltage : AC 500V for one minute

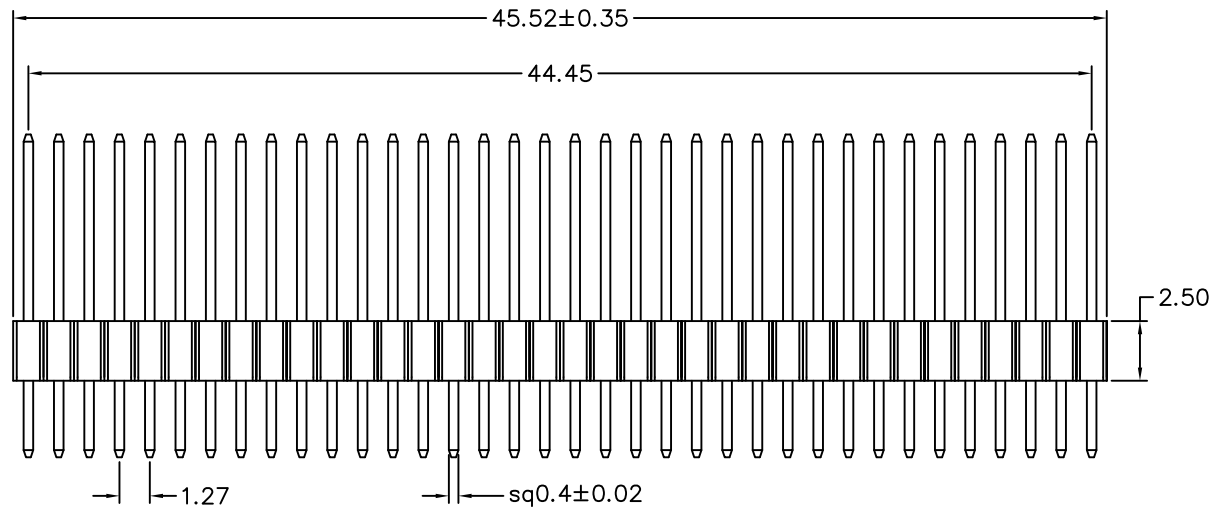

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, $\pm$

CHECKED BY GENIUS

.X $\pm$ 0.30

UNIT / mm

SCALE 1 : 1

.XX $\pm$ 0.20

DATE

.XXX $\pm$

ANG $\pm$ 3°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

PA-D258030-1X36-LF
SERIES | | | | LEADFREE
| | | | 36 WAY
| | | | DIP 3.0mm
| | | | CONTACT 8.0mm
| | | | BASE 2.5mm
| | | | DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: PIN HEADER 1.27*1.27mm STRAIGHT TYPE, SINGLE ROW