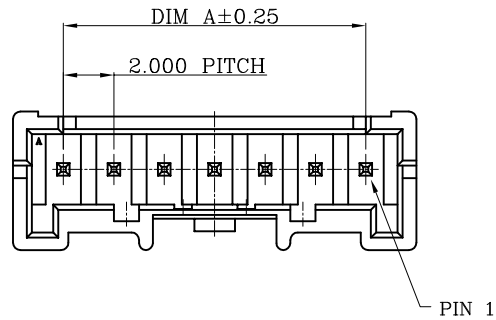


TABLE-1




CIRCUITS	VOID TYPE NO.	VOID CIRCUIT
3	02	2
4	03	3
5	2B	3,4
6	B2	2,4
6	B3	3,5
7	2A	2,3
7	D4	2,3,5,6
15	CF	1,2,3

NOTES :

1. MATERIAL:

BASE: PA66-GF15 94V-0 / PBT 94V-0, NATURAL

PIN: BRASS, MATTE TIN-PLATED

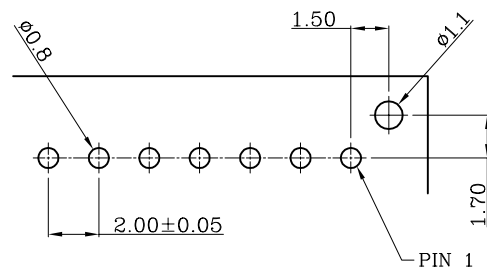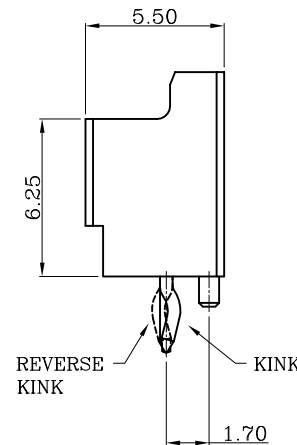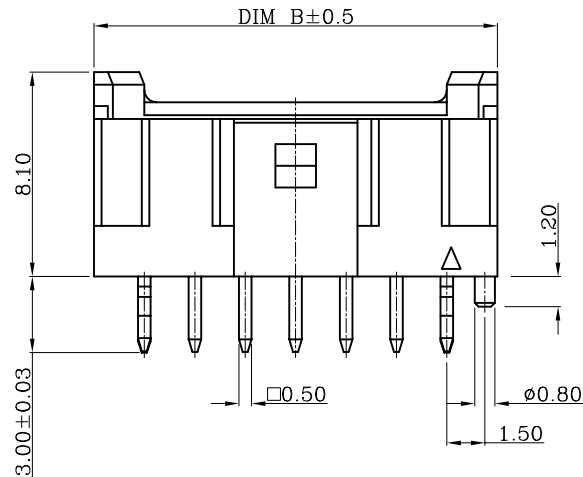


P. C. BOARD LAYOUT

KINK STSTUS

● FIG. KINK

⦿ FIG. REVERSE KINK

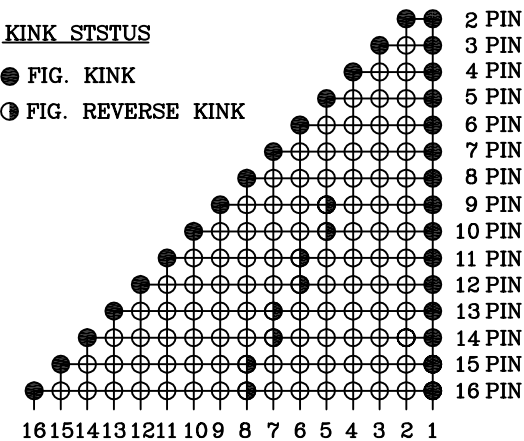

DIMENSIONS:

CIRCUITS	DIM.A	DIM.B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.12
.XXX ± 0.08
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

PA-DPcc-xx-LF
SERIES | LEADFREE
DIP 180° | 02~16WAY
POST | BK:BLACK
BL:BLUE
RD:RED

DESCRIPTION: 2.00mm PITCH HEADER DIP TYPE (180°)