

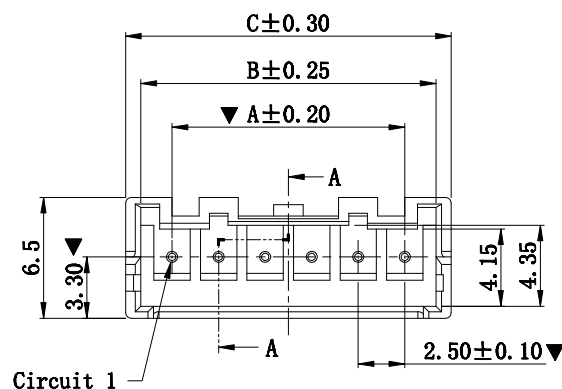
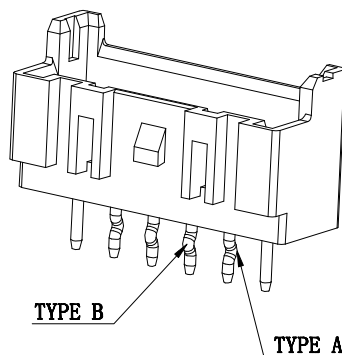
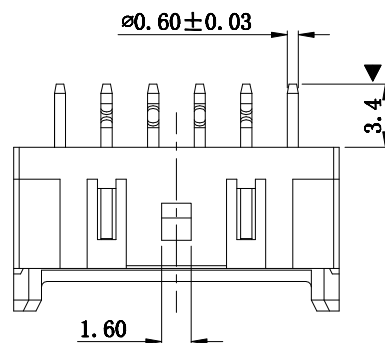
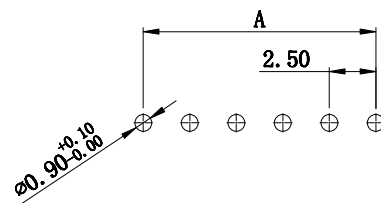


SECTION: A-A



RECOMMENDED P. C. B LAYOUT T=1.60mm
(TOLERANCE: $\pm 0.05\text{mm}$)



Specifications:

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 20\text{m}\Omega$

WAFER

- Poles : 02-15P
- Housing Material: Nylon66 UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

打外K 对应PIN脚和方向(A Or B)

Poles	PIN No	1	2	3	4	5	6	N-2	N-1	N
6 PIN Over	TYPE	-	A	B	-	-	-	B	A	-
6 PIN		-	A	B	B	A	-			
5 PIN		A	B	-	B	A				
4 PIN		A	B	B	A					
3 PIN		A	B	A						
2 PIN		A	B							

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.50	5.85	7.50	09	20.00	23.35	25.00
03	5.00	8.35	10.00	10	22.50	25.85	27.50
04	7.50	10.85	12.50	11	25.00	28.35	30.00
05	10.00	13.35	15.00	12	27.50	30.85	32.50
06	12.50	15.85	17.50	13	30.00	33.35	35.00
07	15.00	18.35	20.00	14	32.50	35.85	37.50
08	17.50	20.85	22.50	15	35.00	38.35	40.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X ± 0.30
.XX ± 0.25
.XXX ± 0.20
ANG $\pm 1^{\circ}$















PPOJECTION

照片框

ORDER INFORMATION

PA-DXcc-xx-LF
SERIES LEADFREE
02~15 WAY
BR: BROWN
GR: GREEN
WH: WHITE
NON POST
DIP 180°

DESCRIPTION:



02Pin

03Pin









04Pin

05Pin

06Pin

07Pin

08Pin

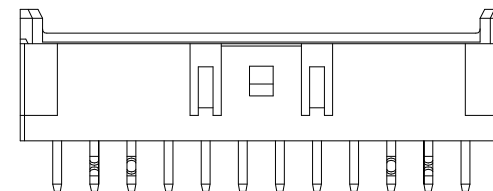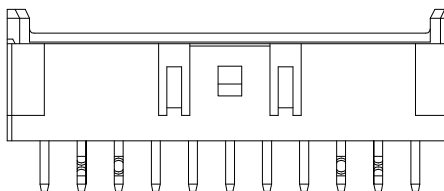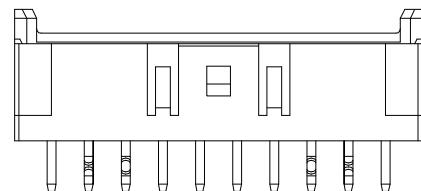
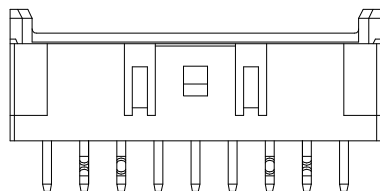






09Pin

10Pin

11Pin

12Pin

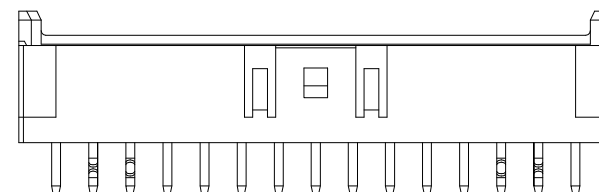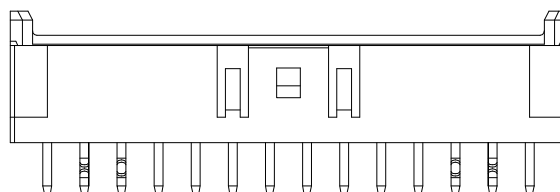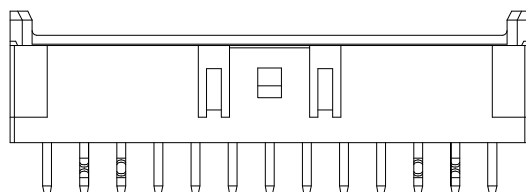

13Pin

14Pin

15Pin

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.25
.XXX $\pm$ 0.20
ANG $\pm$ 1°

照片框

ORDER INFORMATION

PA-DXcc-xx-LF
SERIES LEADFREE
02~15 WAY
BR:BROWN
GR:GREEN
WH:WHITE
NON POST
DIP 180°

DESCRIPTION: