

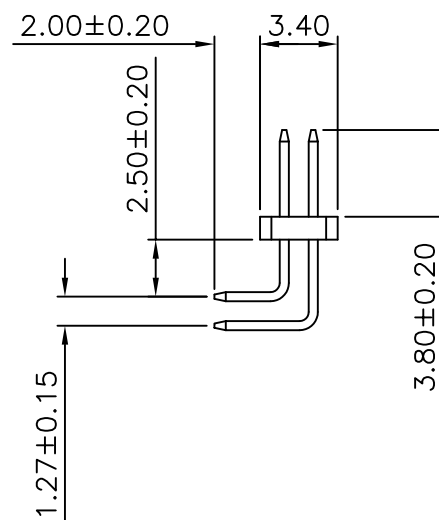
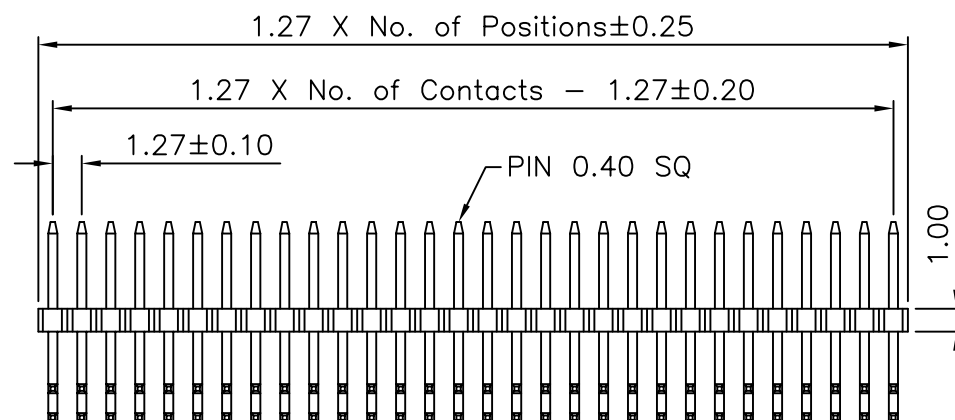


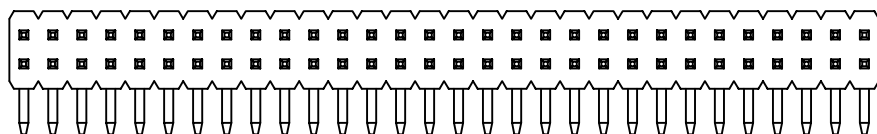

Recommended P.C.Board
Hole Layout



Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
Insulation Material: Polyester, UL 94V-0
Nylon 6T

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

PPOJECTION



ORDER INFORMATION

PA-R10253820-2Xxx-LF
SERIES
DIP 90°
BASE 1.0mm
CONTACT R/A 3.8mm
DIP 2.0mm
2X02:04WAY
2X50:100WAY
LEADFREE

DESCRIPTION: