
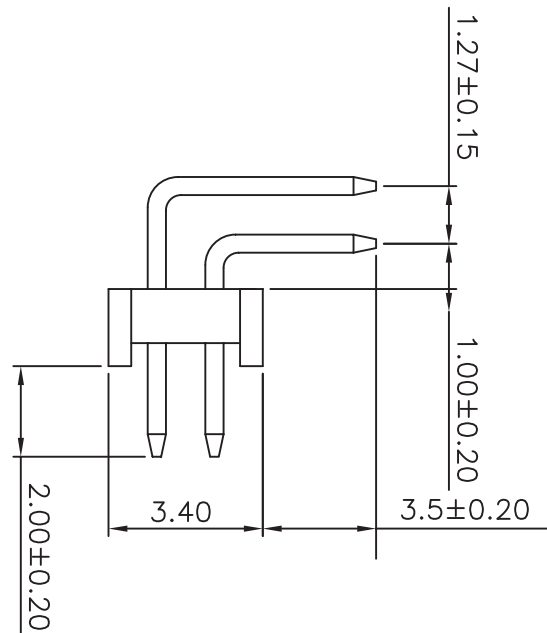
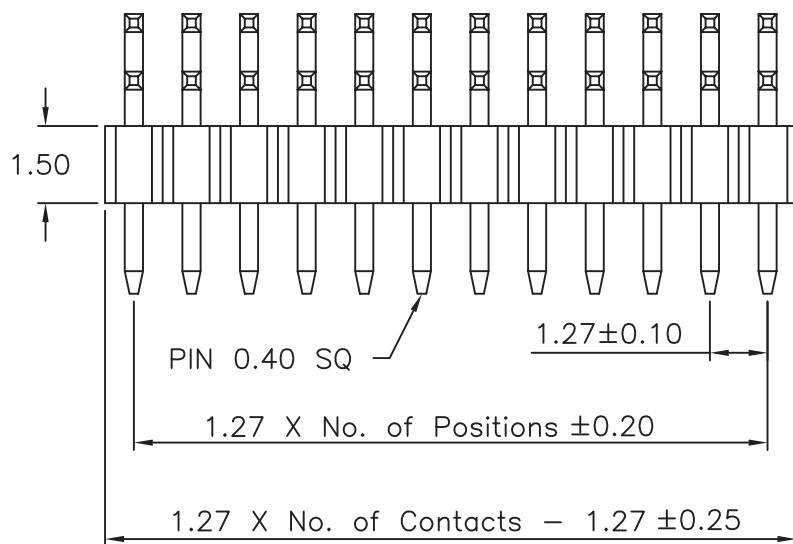


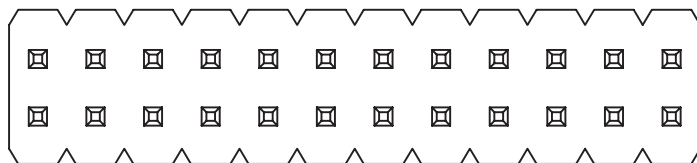

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC/DC

Contact Resistance: 20mΩ Max.


Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy

Insulation Material: Polyester, UL 94V-0
Nylon 6T

Recommended P.C.Board Hole Layout



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

P PROJECTION

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

照片框

ORDER INFORMATION

PA-RH15103520-2Xxx-LF

SERIES PA-RH15103520-2Xxx-LF
DIP 90° HIGH BASE 1.5mm R/A 1.0mm
CONTACT 35:3.5mm
2X02:04WAY
2X50:100WAY
DIP 20:2.0mm
LEADFREE

DESCRIPTION: 1.27 PIN HEADER DUAL ROWS (R/A) TYPE BASE 1.5H