
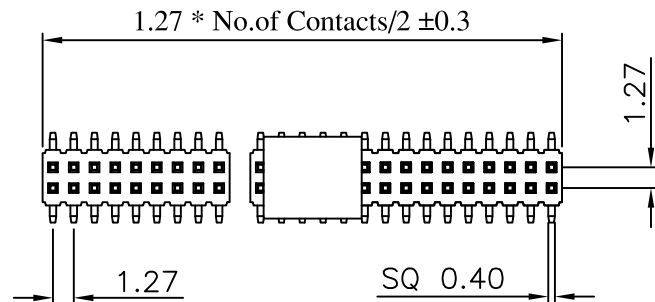
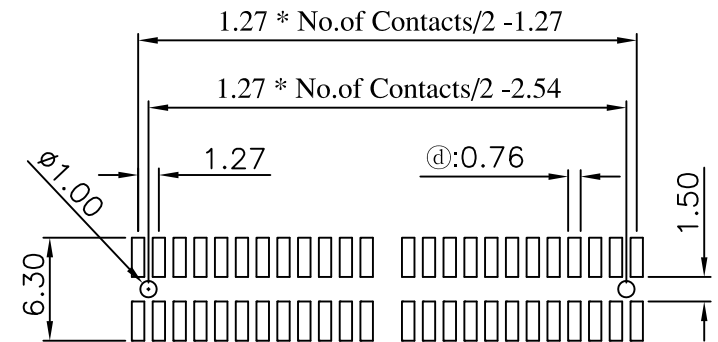
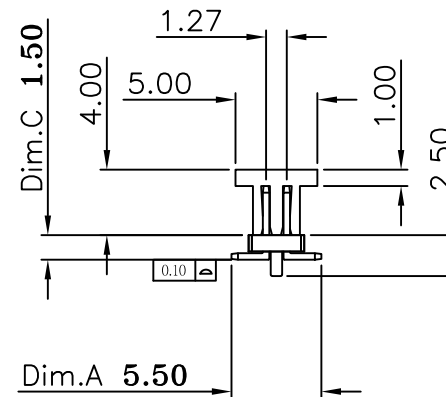


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: High Temperature Polyester,UL 94V-0

Standard:Gold Flash all over

Recommended P.C. Board
 SMD Layout

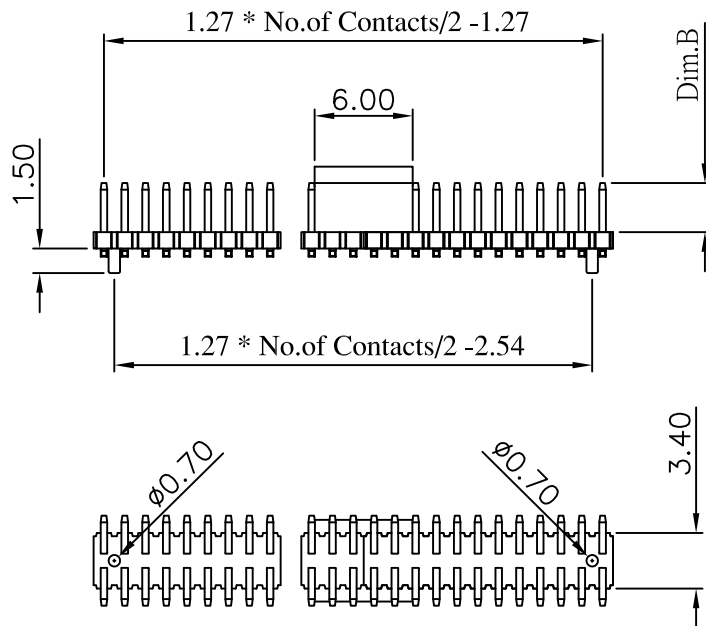

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
PA-V15P30C-2Xxx	5.50mm	3.00mm	@:1.50mm
PA-V15P18C-2Xxx	5.50mm	1.80mm	@:1.50mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-V15PxxC-2Xxx-LF
 SERIES LEADFREE
 2X03:06WAY
 2X50:100WAY
 180°
 HIGH 1.5mm
 POST
 CAP
 30:CONTACT 3.0mm
 18:CONTACT 1.8mm

DESCRIPTION: