
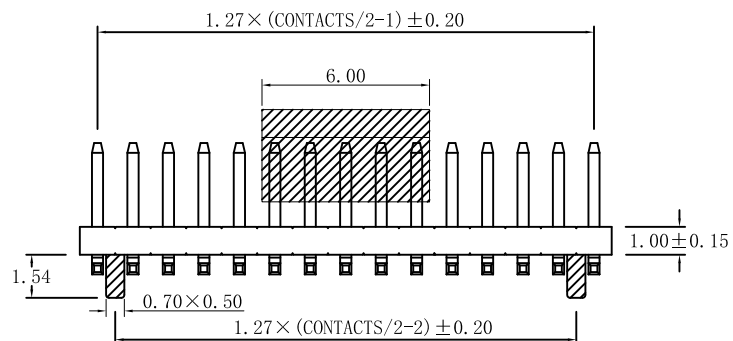
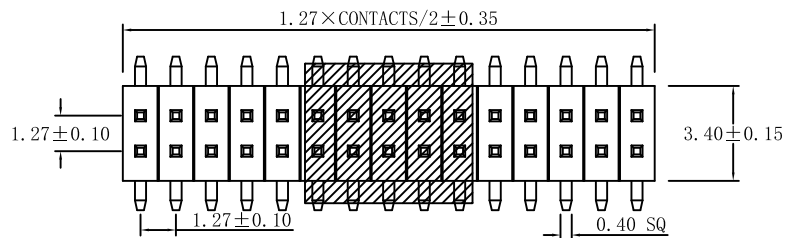


P.C.B . LAYOUT



A: 5.50 mm

B: 3.50 mm

C: 1.60 mm

MATERIAL

HOUSING : NY6T, UL-94V0

CAP : NY6T, UL-94V0

CONTACT : COPPER ALLOYS

PLATED : GOLD-FLASH

COLOR : BLACK

SPECIFICATION

CURRENT : 1A

OPERATING TEMPERAURE : -55° C TO +105° C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE: 1000 MEGAOHMS MIN

WITHSTAND VOLTAGE : 500 V AC/MINUTE

CONTACTS			
	2×12	2×25	2×38
	2×13	2×26	2×39
	2×14	2×27	2×40
	2×15	2×28	2×41
	2×16	2×29	2×42
2×04	2×17	2×30	2×43
2×05	2×18	2×31	2×44
2×06	2×19	2×32	2×45
2×07	2×20	2×33	2×46
2×08	2×21	2×34	2×47
2×09	2×22	2×35	2×48
2×10	2×23	2×36	2×49
2×11	2×24	2×37	2×50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

PA-V16P35C-2Xxx-LF
SERIES
180°SMT
HIGH 1.6mm
LEADFREE
2X04:08 WAY
2X50:100 WAY
CAP
CONTACT 3.5mm
POST

DESCRIPTION: PIN HEADER 1.27PH SMT+POST+CAP H:1.00 2xXXPIN