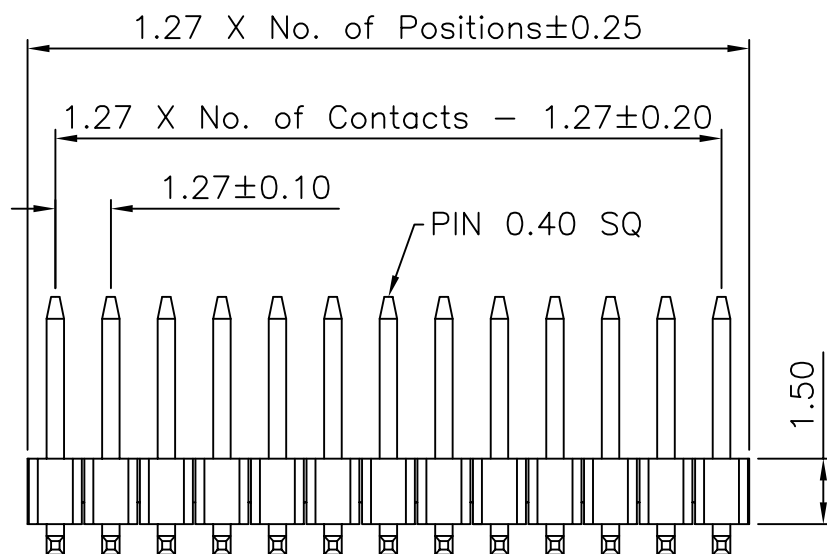
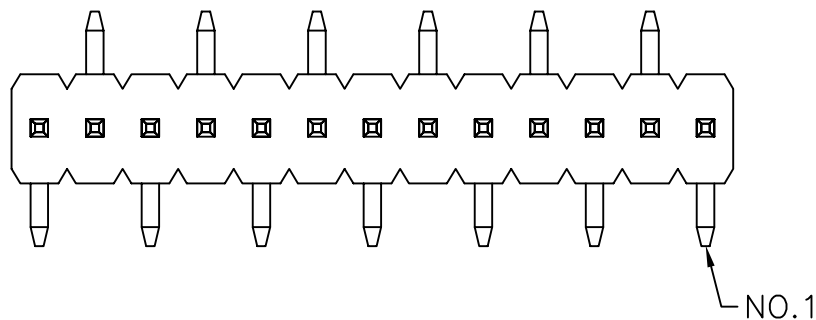


Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Copper Alloy

Insulation Material: Polyester, UL 94V-0

Nylon 6T

RECOMMENDED P.C.B LAYOUT

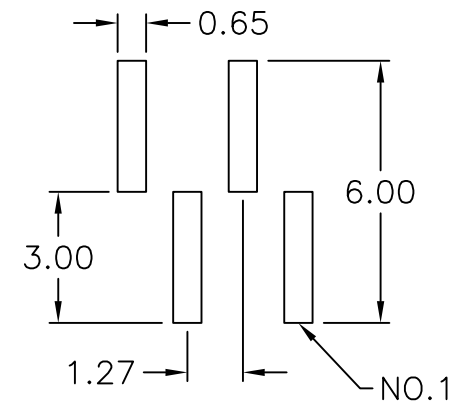

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-V22X37-1XxxR-LF
SERIES
180°SMT
HIGH 2.2mm
LEADFREE
R TYPE FOOT
1X02:02 WAY
1X50:50 WAY
CONTACT 3.7mm
NON POST

DESCRIPTION: 1.27 PIN HEADER SINGLE ROW SMT TYPE BASE 1.50H