

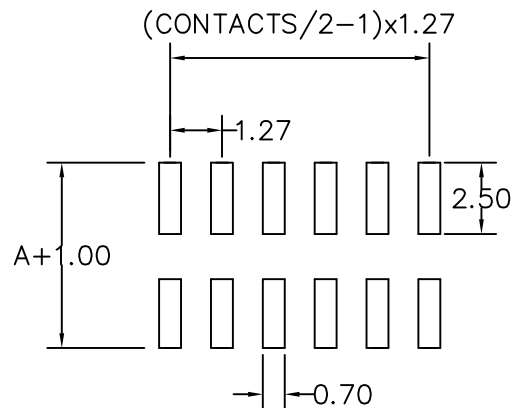
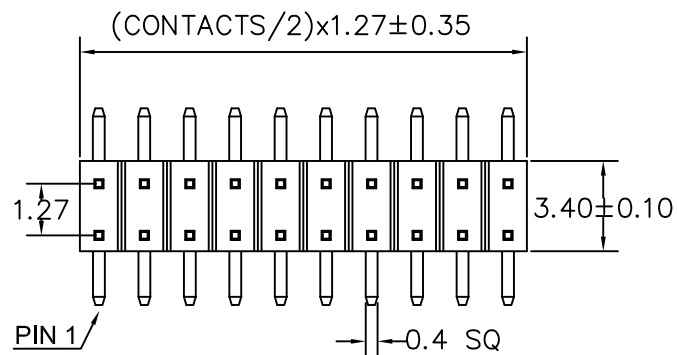




RECOMMENDED P.C.B LAYOUT

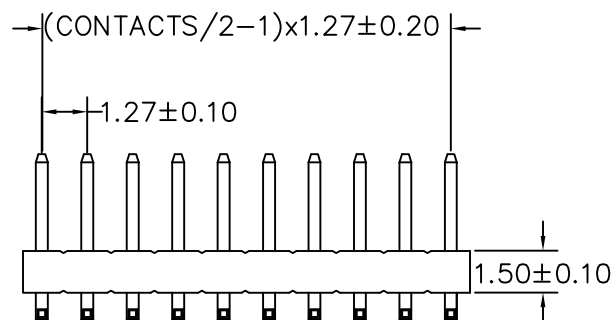

A: 5.50 mm B: 7.00 mm C: 2.20 mm

| CONTACTS | 2X26 |
|----------|------|
| 2X2      | 2X27 |
| 2X3      | 2X28 |
| 2X4      | 2X29 |
| 2X5      | 2X30 |
| 2X6      | 2X31 |
| 2X7      | 2X32 |
| 2X8      | 2X33 |
| 2X9      | 2X34 |
| 2X10     | 2X35 |
| 2X11     | 2X36 |
| 2X12     | 2X37 |
| 2X13     | 2X38 |
| 2X14     | 2X39 |
| 2X15     | 2X40 |
| 2X16     | 2X41 |
| 2X17     | 2X42 |
| 2X18     | 2X43 |
| 2X19     | 2X44 |
| 2X20     | 2X45 |
| 2X21     | 2X46 |
| 2X22     | 2X47 |
| 2X23     | 2X48 |
| 2X24     | 2X49 |
| 2X25     | 2X50 |

#### MATERIAL

HOUSING : NYLON 6T,UL94V-0  
CONTACT : COPPER ALLOYS  
PLATED : GOLD-FLASH  
COLOR : BLACK

#### SPECIFICATION

CURRENT: 1A  
OPERATING TEMPERATURE: -55°C TO +105°C  
CONTACT RESISTANCE : 20 MILLIOHMS MAX  
INSULATION RESISTANCE : 5000 MEGAOHMS MIN  
DIELECTRIC STRENGTH : 1000 VA

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.38  
.XX ± 0.25  
.XXX ±  
ANG ± 5°

照片框

#### ORDER INFORMATION

PA-V22X70-2Xxx-LF  
SERIES  
180°SMT  
LEADFREE  
2X02:04 WAY  
2X50:100 WAY  
CONTACT 7.0mm  
NON POST  
HIGH 2.2mm

DESCRIPTION: PIN HEADER 1.27X1.27 SMT