
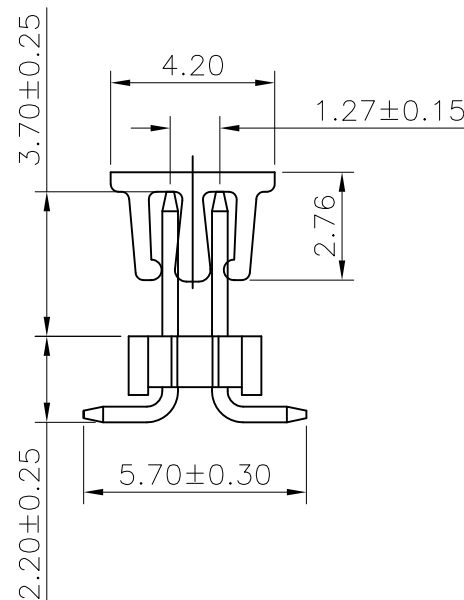
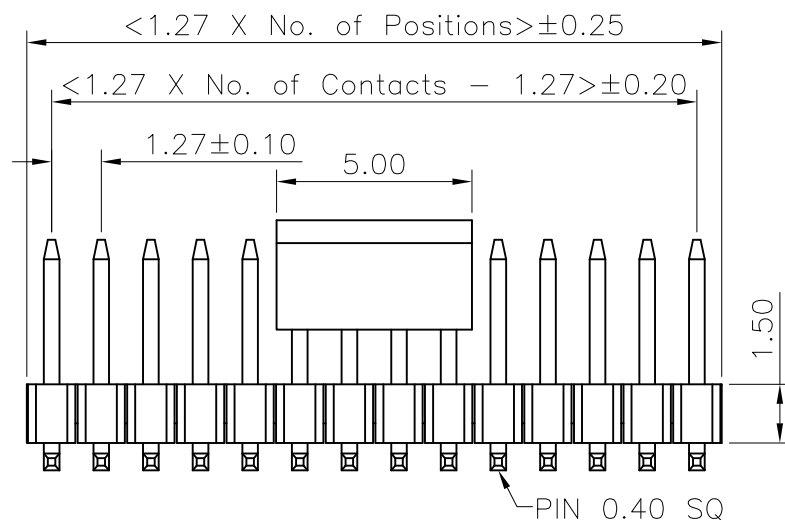


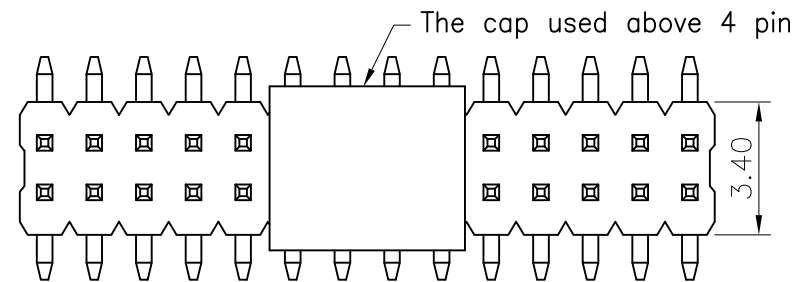

Specifications

Current Rating:1Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding: 300VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C

Materials

Contact Material: Brass


Insulator Material: High Temperature

Thermoplastic, UL 94V-0 LCP

or the equivalent material

RECOMMENDED P.C.B LAYOUT

(Tolerance:±0.05)

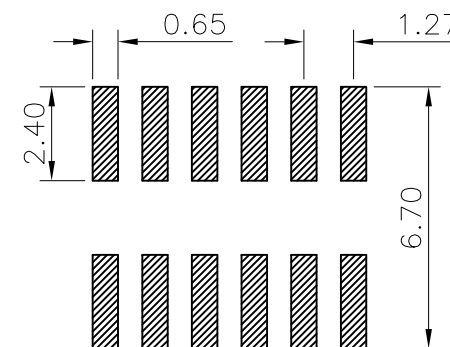

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-V22XC-2Xxx-LF

SERIES

LEADFREE

2X02:04 WAY

2X33:66 WAY

180°SMT

CAP

NON POST

HIGH 2.2mm

DESCRIPTION: