


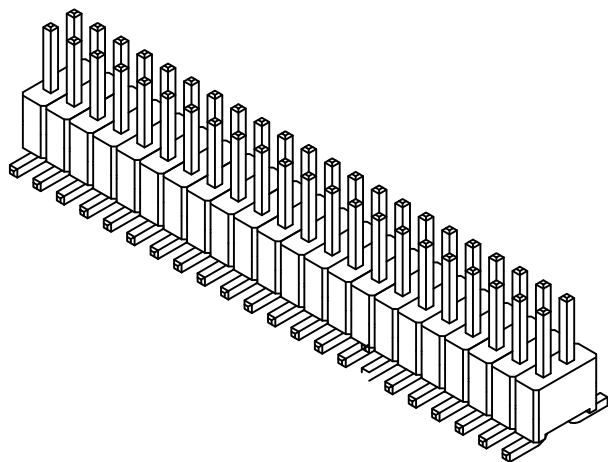


Conteract:

Contact:Brass.



Insuiator:Nylon 6T.

Finish:Gold flash plated over nickel.

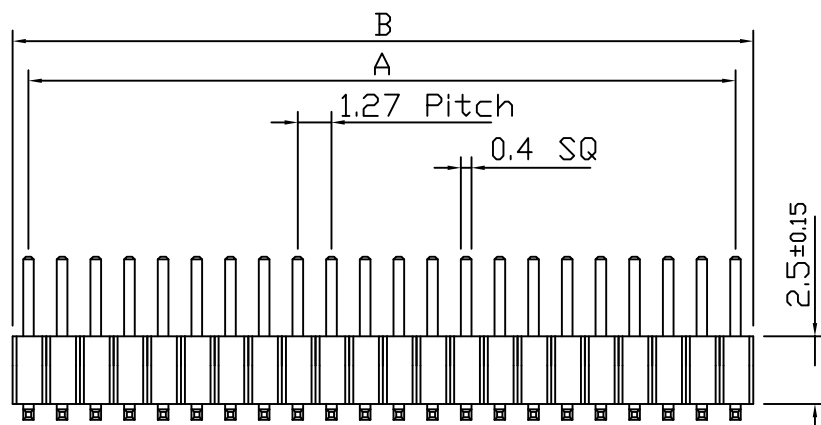

$A = 1.27 \times (\text{NO of Positions} - 1)$

$B = A + 1.27 \pm 0.3$

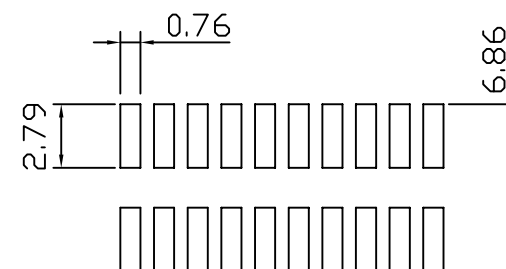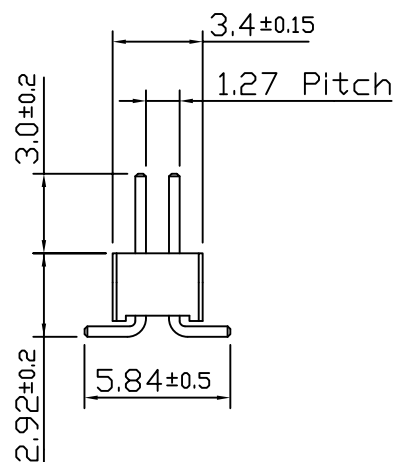

P.C.Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-V29X30S15-2Xxx-LF

SERIES
180°SMT
HIGH 2.92mm
NON POST
CONTACT 3.0mm
SEMI GOLD 15u"
2X50:100 WAY
2X02:04 WAY
LEADFREE

DESCRIPTION: 1.27X1.27 PIN HEADER SMT DUAL ROW