

Specifications

1.MATERIAL :

Housing :LCP+30%G.F UL94V-0 ,Color : Black

Contact :Brass ,GOLD FLASH PLATING OVER ALL

30u"NICKEL UNDERPLATING OVER ALL

2.characteristics :



Raring Current :1 AMP

Contact Resistance :20M Ω MAX.

Insulating Resistance :1000M Ω MIN.



Withstanding Voltage :AC 500V/Minute.

Temperture Range : -40 $^{\circ}$ C to +105 $^{\circ}$ C

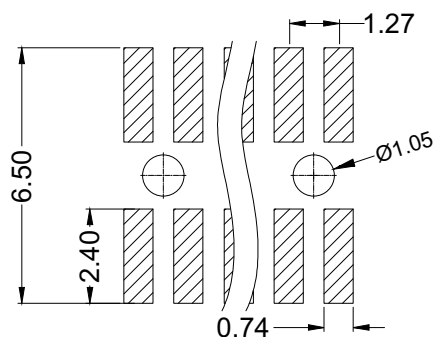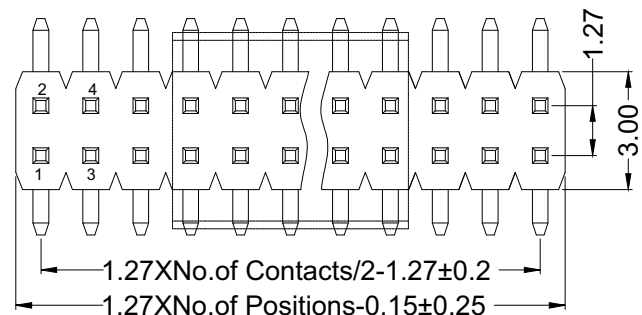

Recommended P.C.B LAYOUT

General Tolerance $\pm$ 0.05

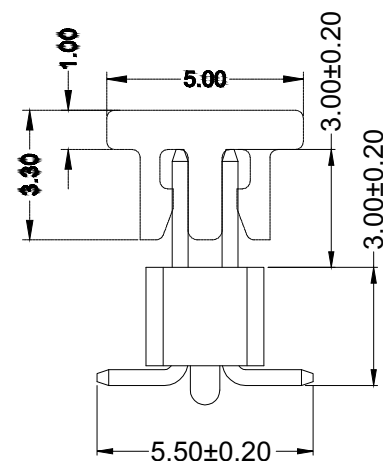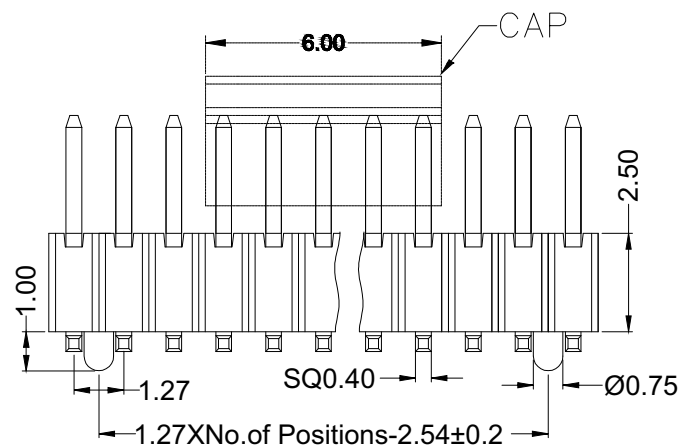

PIN > 2*20PIN	0.15
2*20PIN > 2*10PIN	0.12
2*10PIN > 2*10PIN	0.10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

照片框

ORDER INFORMATION

PA-V30P30C-2Xxx-LF

SERIES
180°SMT
HIGH 3.0mm
CAP
CONTACT 3.0mm
POST
LEADFREE
2X02:04 WAY
2X50:100 WAY

DESCRIPTION: