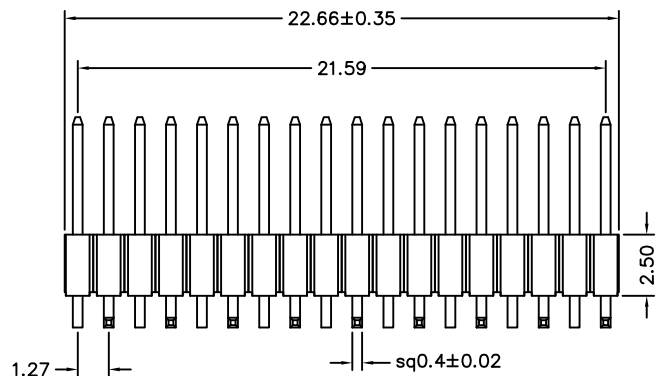
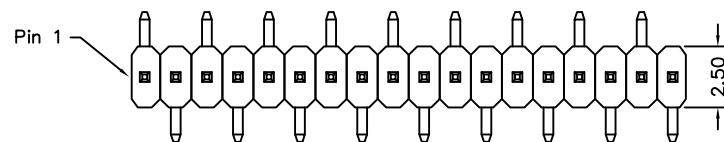


Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

Insulator: NY6T UL94-V0

SPECIFICATION

Current Rate : 3 AMP


Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operating Temperature : -40°C to +105°C

Plated:Gold-Flash



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

PA-V38X48-1X18R-LF
SERIES
180°SMT
CONTACT 4.8mm
NON POST
HIGH 3.8mm
LEADFREE
R TYPE FOOT
18 WAY

DESCRIPTION: PIN HEADER 1.27*1.27mm SMT S/T TYPE, SINGLE ROW