

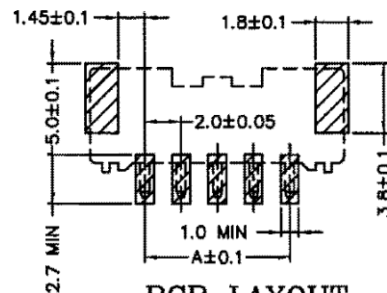



10P~15P




PCB LAYOUT


Material: *Insulator: Nylon 6T UL 94V-0 (Milky Yellow)
 *Contact Post: Brass, Matte Tin Plated
 *Solder Tab: 0.40mm^t Brass, Matte Tin Plated
 Note: RoHS II and Halogen Free Compliance

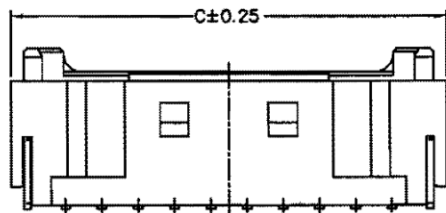


7P~9P



5P~6P



2P~4P

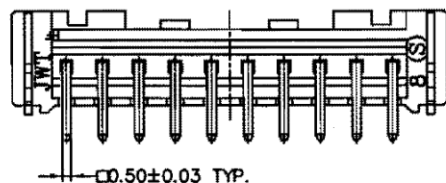

Circuits	Dimensions				PCS/Reel
	A	B	C	D	
2	—	4.5	8.0	—	500
3	4.00	6.5	10.0		500
4	6.00	8.5	12.0		500
5	8.00	10.5	14.0		500
6	10.00	12.5	16.0	7.00	500
7	12.00	14.5	18.0		500
8	14.00	16.5	20.0		500
9	16.00	18.5	22.0		500
10	18.00	20.5	24.0	13.60	500
11	20.00	22.5	26.0		500
12	22.00	24.5	28.0		500
13	24.00	26.5	30.0		500
14	26.00	28.5	32.0		500
15	28.00	30.5	34.0		500

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±




照片框

ORDER INFORMATION

PA-VXR-xx-LF
 SERIES REEL LEADFREE
 02~15 WAY
 NON POST
 180°SMT




DESCRIPTION:

Feeding Direction

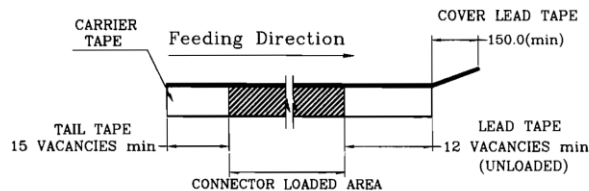

2 TO 4 CIRCUITS



Feeding Direction

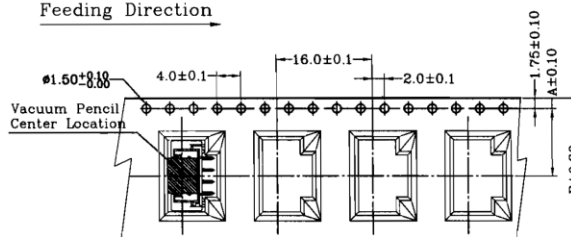


注: 2P, 3P, 4P各為專用CAP,
5-9P專用, 10-15P專用

5 TO 15 CIRCUITS

Feeding Direction

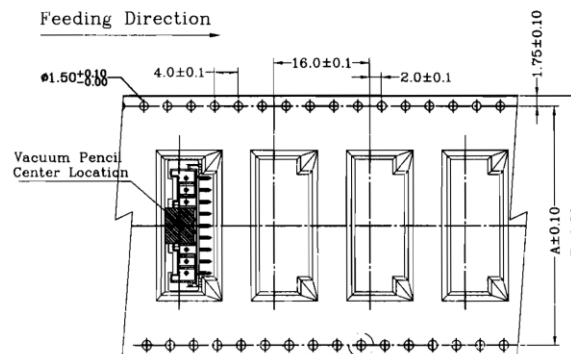

Circuits	Dimensions		Pcs/Reel
	A	B	
2	11.50	24.00	500
3	11.50	24.00	500
4	11.50	24.00	500
5	28.40	32.00	500
6	28.40	32.00	500
7	28.40	32.00	500
8	40.40	44.00	500
9	40.40	44.00	500
10	40.40	44.00	500
11	40.40	44.00	500
12	40.40	44.00	500
13	40.40	44.00	500
14	52.40	56.00	500
15	52.40	56.00	500



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

PA-VXR-xx-LF
SERIES REEL LEADFREE
02~15 WAY
NON POST
180°SMT

DESCRIPTION: