

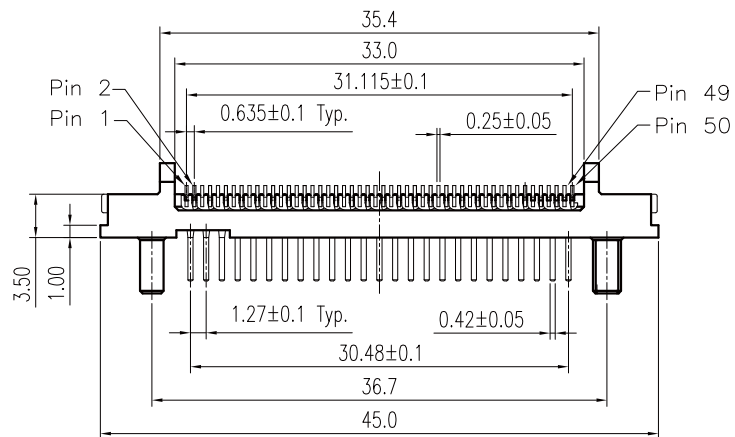
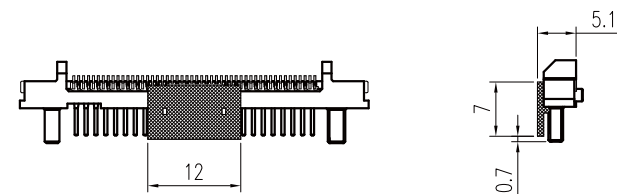

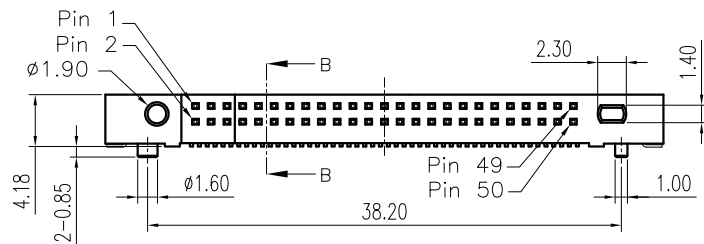


Section B-B
Scale 3.2:1

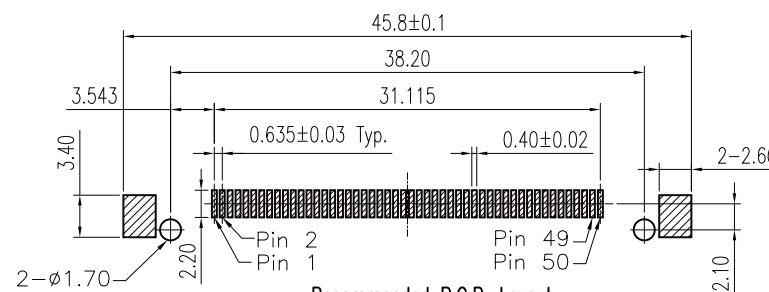

With Cap
Scale 1:1

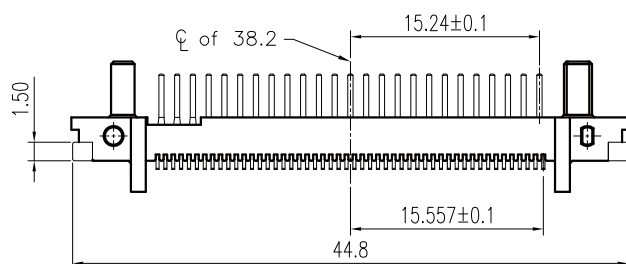

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

Notes:

- Material :
Housing : Thermoplastic, UL 94V-0, Black
Terminal : Copper Alloy
Slider Clip : Copper Alloy
- Finish :
Terminal : 10u" Min. Gold on Contact Area,
1u" Min. Gold on Solder Tail
Both over 30u" Min. Ni Under-plated Overall.
Slider Clip : 1u" Min. Gold on Solder Tail,
Both Over 50u" Min. Ni Under-plated Overall.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PA-W41ELPC-2X25-LF
SERIES
90°SMT
HIGH 4.18mm
CAP POST
LATCH
50 WAY
LEADFREE
EAR

DESCRIPTION: 1.27mm C.F. Male Conn.