

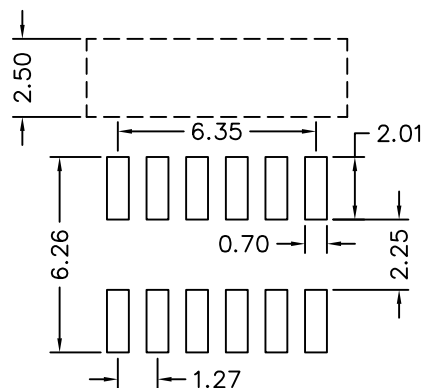
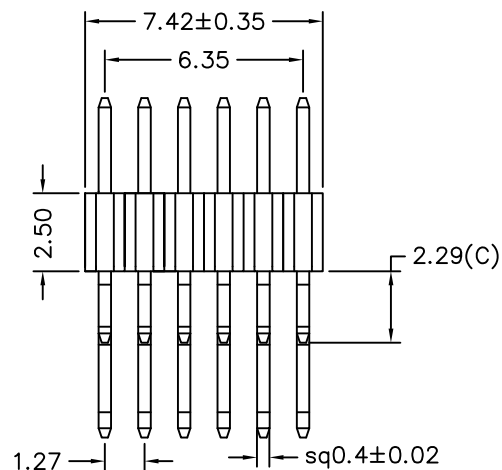


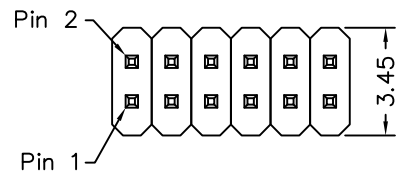

Recommended P.C.B Layout

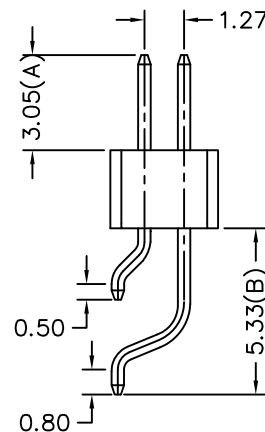

MATERIAL
Contact Pin : Brass

SPECIFICATION
Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

PA-WX30-2X06-LF
SERIES | LEADFREE
12 WAY
CONTACT 3.05mm
NON POST
90°SMT

DESCRIPTION: PIN HEADER 1.27*1.27mm DUAL ROW, HORIZONTAL PIN