
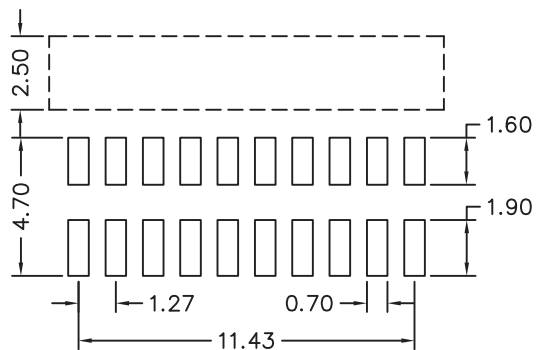
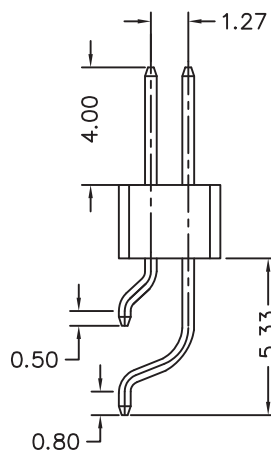
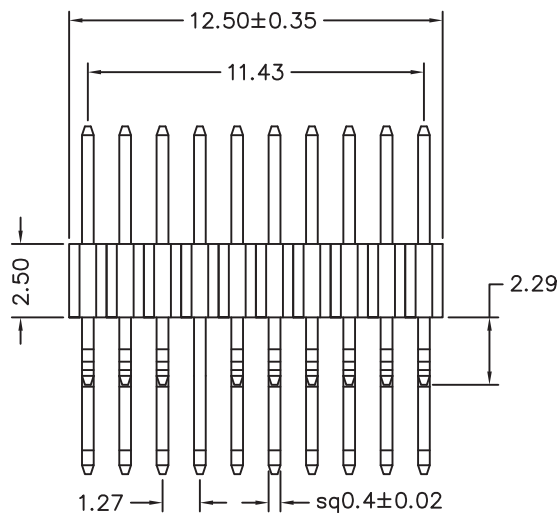


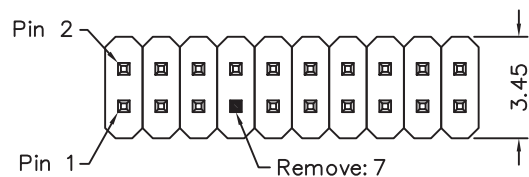

Recommended P.C.B Layout

MATERIAL

Insulator: NY6T

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature: -40°C to +105°C

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

ORDER INFORMATION

PA-WX40-2X10-LF
SERIES | LEADFREE
20 WAY
CONTACT 4.0mm
NON POST
90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: PIN HEADER 1.27*1.27mm DUAL ROW, HORIZONTAL PIN TUBE