

Features:

- 2 ~ 15 circuits available
- Material: Nylon 6T, UL 94V-0
- Contact & solder tab: Tin-plated brass pin
- Color: Natural


Specification:

- Current rating: 3A AC, DC Max.
- Voltage rating: 250V AC, DC
- Contact resistance: 20mΩ Max.
- Dielectric withstanding voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min.
- Ambient temperature range: -25°C ~ 85°C

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
N	2 x (N - 1)	2 x N + 4

&& N = 2 ~ 15

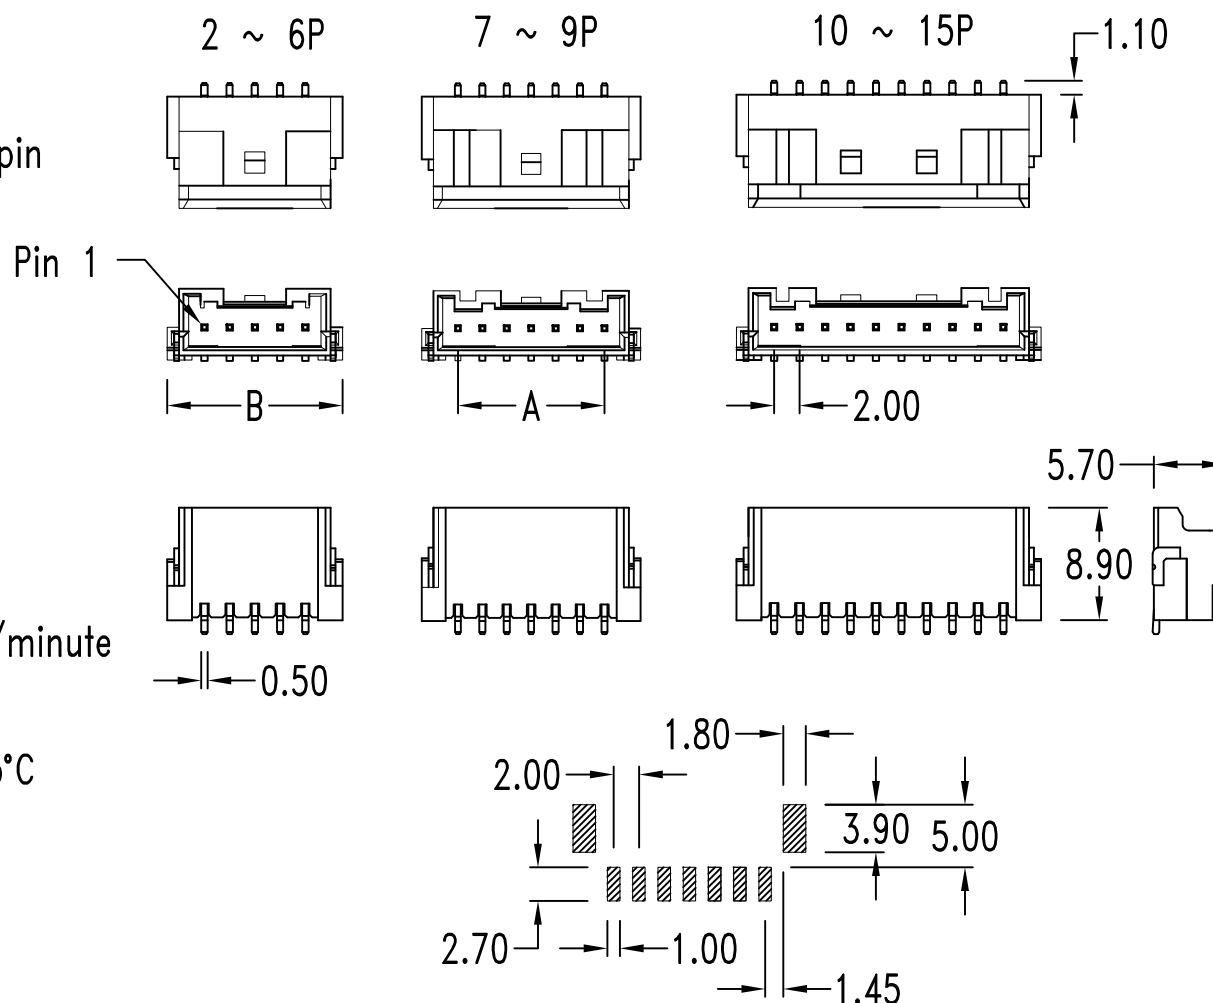

P. C. board hole dimensions

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE






X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

PA-WXR-xx-LF
SERIES REEL NON POST 90° SMT
LEADFREE 02~15WAY

DESCRIPTION: .079"(2.0mm) Right Angle Header, SMT

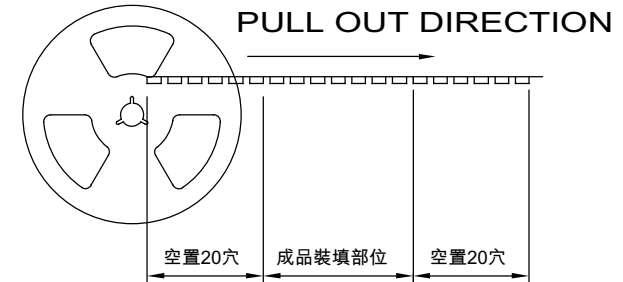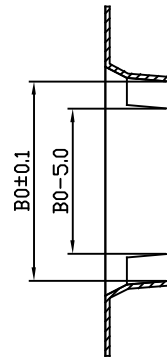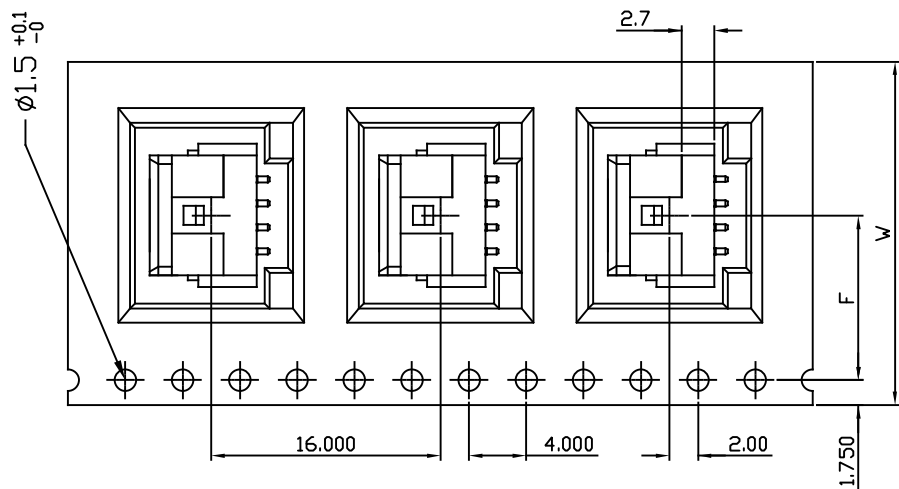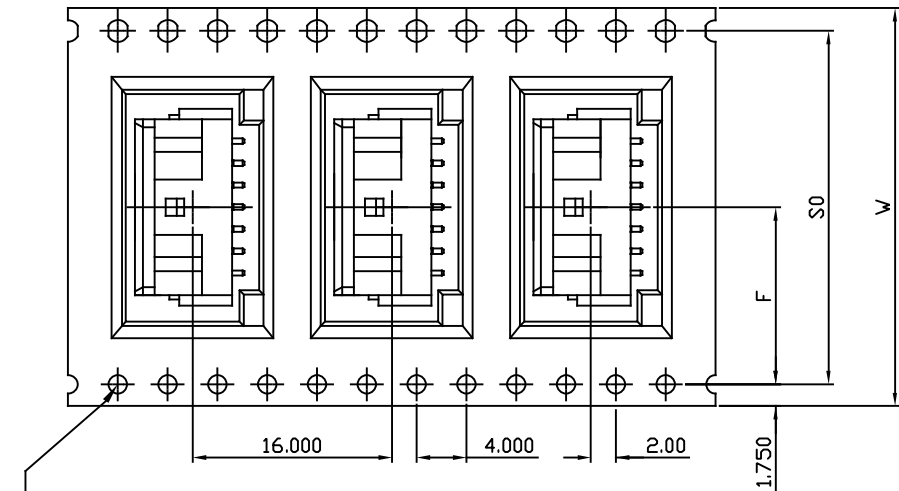

Circuits	Dim. W	Dim. F	Dim. S0	Dim. B0
N = 2 ~ 4	24.0	11.500		2 x N + 4.3
N = 5 ~ 7	32.0	14.200	28.400	
N = 8 ~ 13	44.0	20.2±0.15	40.400	
N = 14 ~ 15	56.0	26.2±0.15	52.400	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-WXR-xx-LF
SERIES REEL
LEADFREE
02~15WAY
NON POST
90°SMT

DESCRIPTION: .079"(2.0mm) Right Angle Header, SMT