



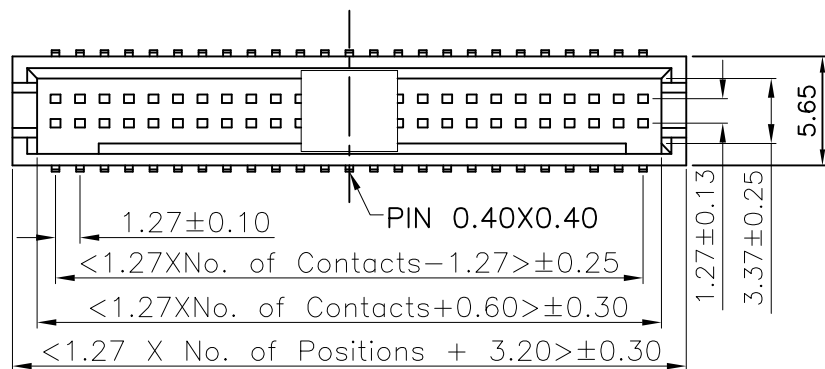

Recommended P.C.Board Layout
(Tolerance:±0.05)

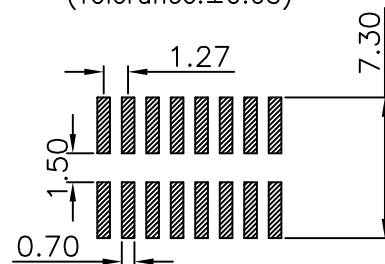

Specifications

Current Rating:1Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding: 300VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C




Materials

Contact Material: Phosphor Bronze

Insulator Material:High Temperature

Thermoplastic,UL 94V-0 LCP

or the equivalent material

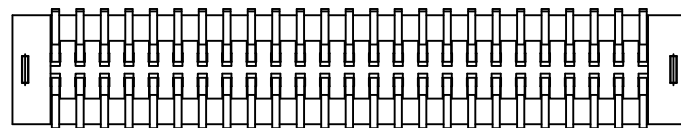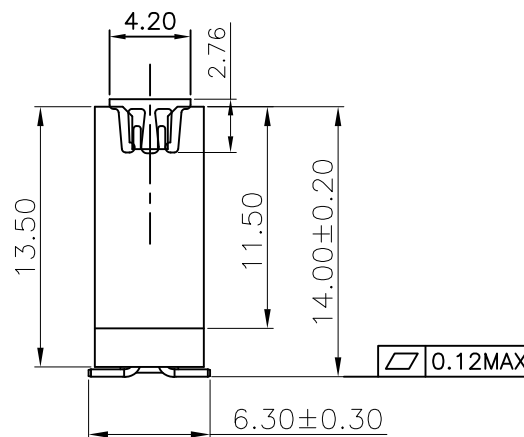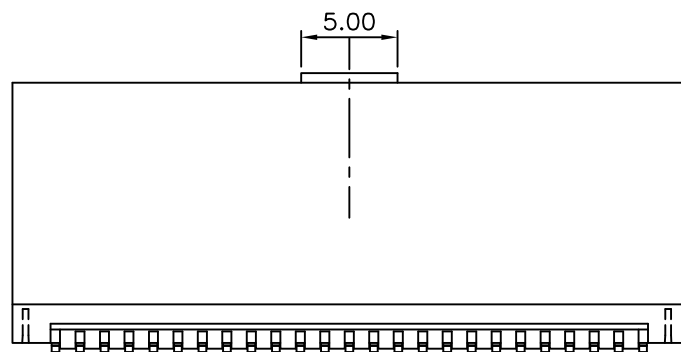

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

PAB-V100XC-2Xxx-LF
SERIES | | | LEADFREE
2X05:10 WAY
2X40:80 WAY
180°SMT | CAP | NON POST
10.0mm HIGH

DESCRIPTION: 1.27 BOX HEADER DUAL ROWS SMT TYPE