


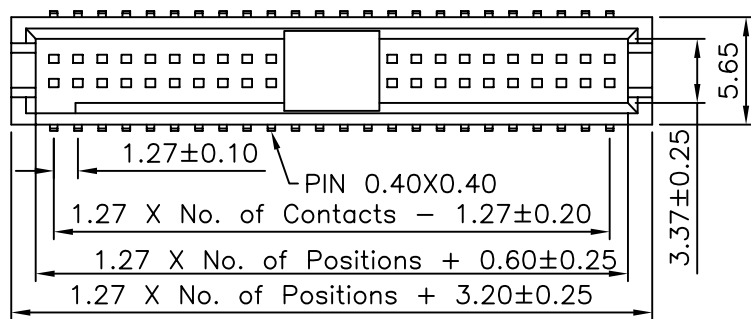


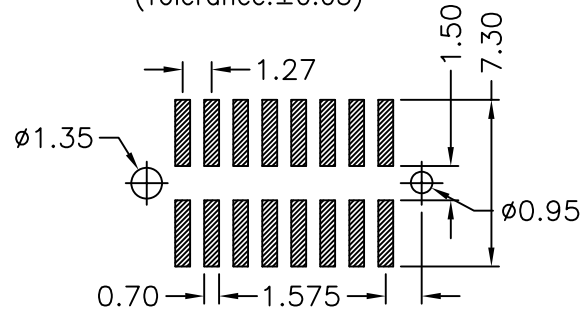

Recommended P.C.Board Layout
(Tolerance:±0.05)

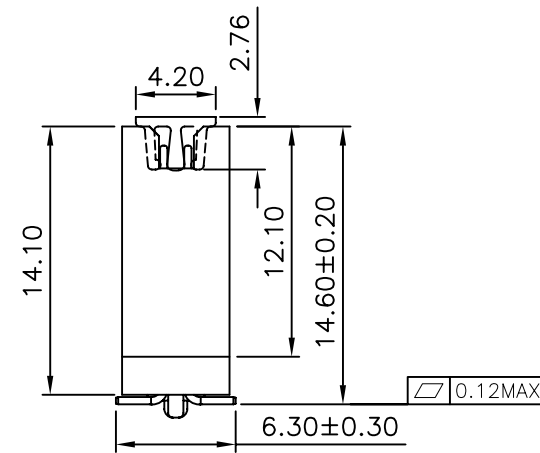

Specifications
Current Rating:1Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding: 300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material: Phosphor Bronze
Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

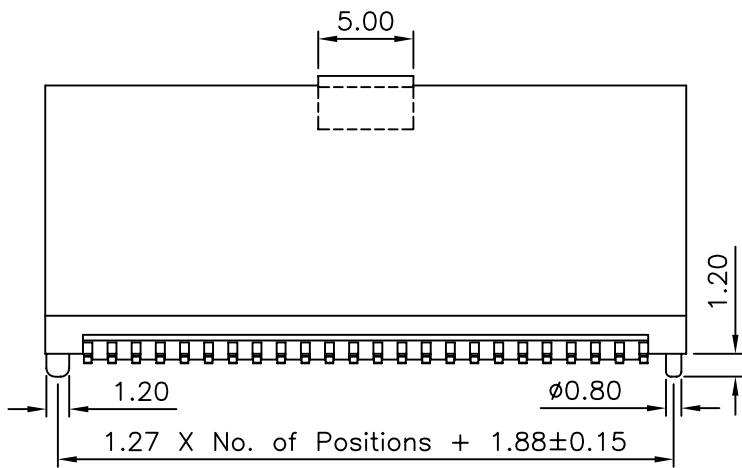

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PAB-V106PC-2Xxx-LF
SERIES
180°SMT
LEADFREE
2X05:10 WAY
2X40:080 WAY
CAP
POST
10.6mm HIGH

DESCRIPTION:1.27 BOX HEADER DUAL ROWS SMT TYPE W/POST AND CAP