

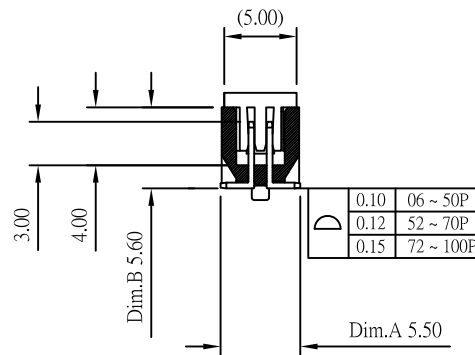
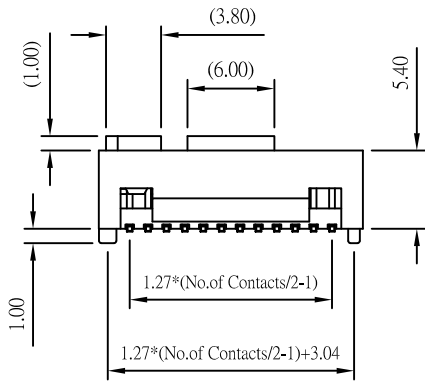
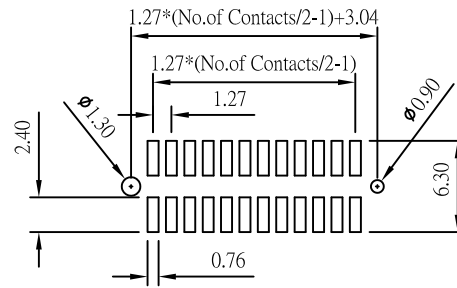
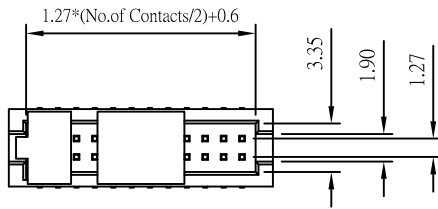


Recommended P.C. Board
SMD Layout


Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Standard: Brass
 Insulator Material: High Temperature
 Plastic, UL 94V-0
 Finish: Standard: Gold Flash all over



06~30 pin : 0.10mm
 32~70 pin : 0.15mm
 72~100 pin : 0.20mm

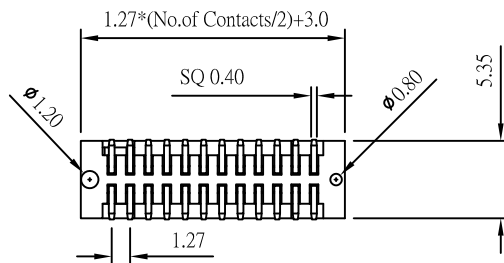

Ⓓ:06~08pin



Ⓔ:10~18pin

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

照片框

ORDER INFORMATION

PAB-V16PC-2Xxx-LF
 SERIES | LEADFREE
 180°SMT | 2X05:10 WAY
 1.6mm HIGH | 2X50:100 WAY
 CAP
 POST

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com