
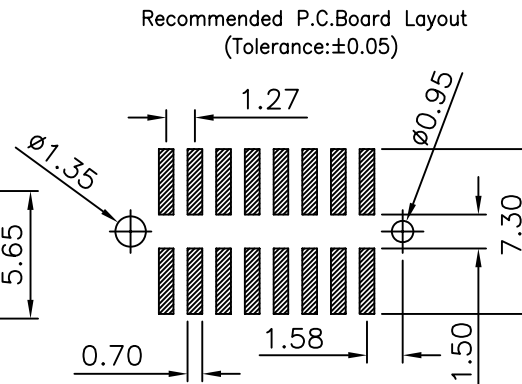



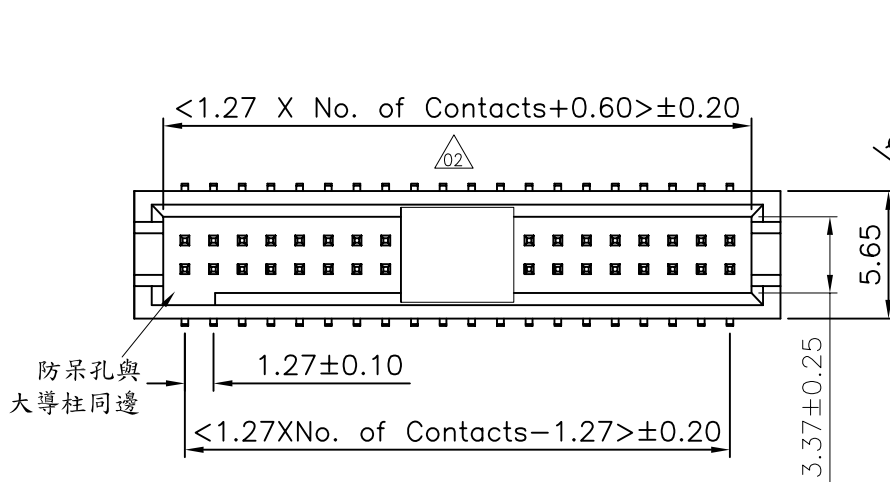


Specifications

- Current Rating: 1Amp
- Insulation Resistance: 1000M Ω Min.
- Dielectric Withstanding: 300VAC
- Contact Resistance: 20m Ω Max.
- Operating Temperature: -40°C to $+105^{\circ}\text{C}$

Materials

- Contact Material: Phosphor Bronze
- Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

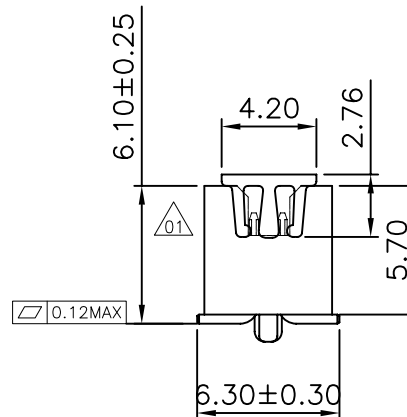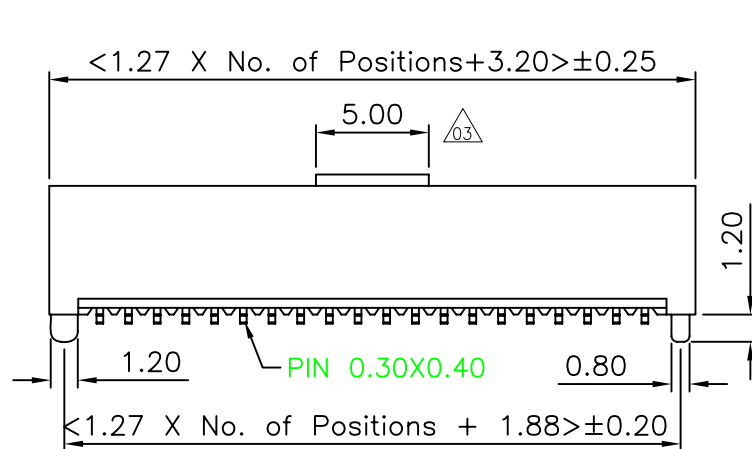

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PAB-V16PLCPC-2Xxx-LF

SERIES | POST | CAP | LEADFREE

180°SMT | POST | LCP | 2X05:10 WAY | 2X50:100 WAY

1.6mm HIGH

DESCRIPTION: 1.27 BOX HEADER DUAL ROWS SMT TYPE W/POST