
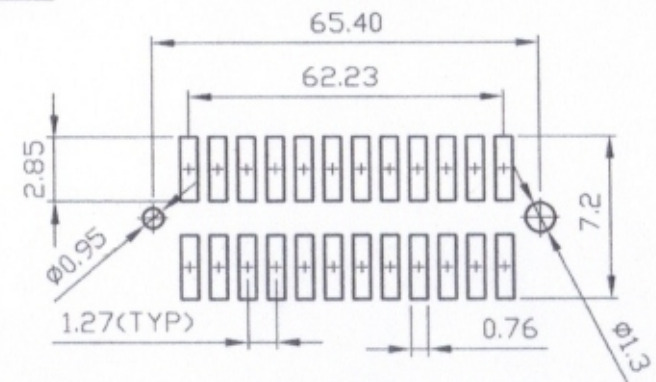
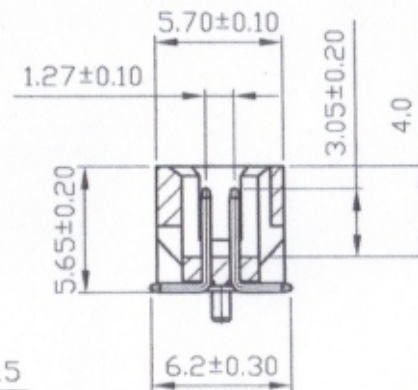


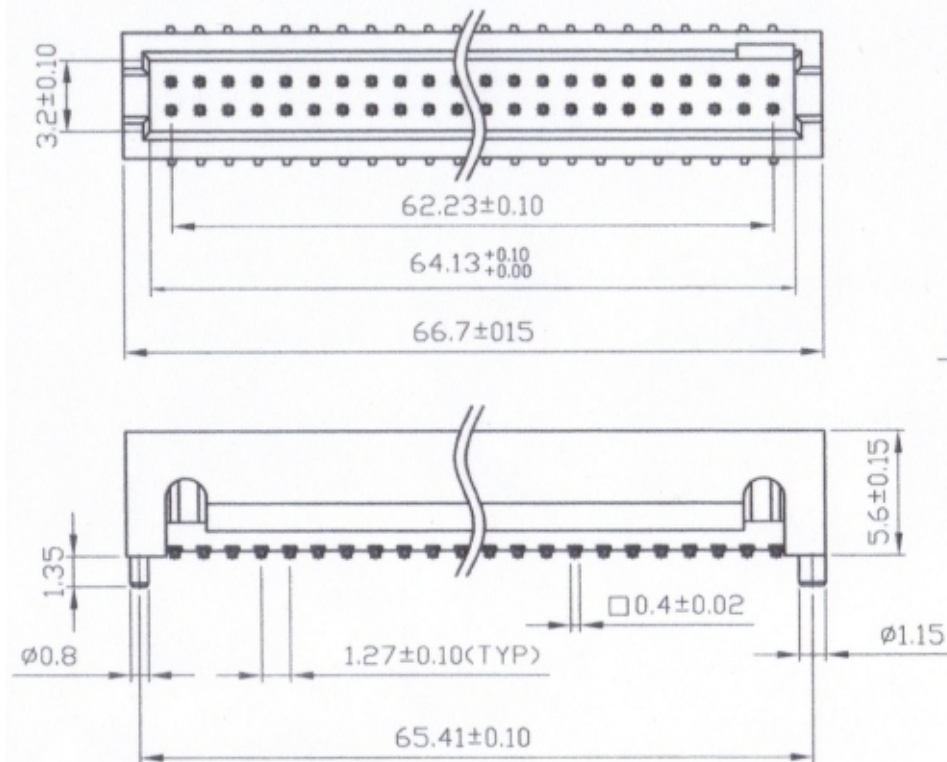

Recommended P.C. Board hole layout

1. SPECIFICATIONS

Current rating : 1Amp
 Insulator resistance : 5000 Megohms min.
 Dielectric withstanding : AC 500V
 Operating temperature : $-40^{\circ} \sim +105^{\circ}\text{C}$
 Max. processing : 230°C for 10 seconds
 260°C for 3-5 Seconds"

2. MATERIAL

Contact : Copper alloy
 Insulator : Nylon 9T
 Thermoplastic UL 94V-0
 Color : black
 Finish : Gold flash all over
 Cap :

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

照片框

ORDER INFORMATION

PAB-V16PN9T-2X50-LF

SERIES
 LEADFREE
 100 WAY
 NYLON 9T
 POST
 1.6mm HIGH
 180°SMT

DESCRIPTION: