
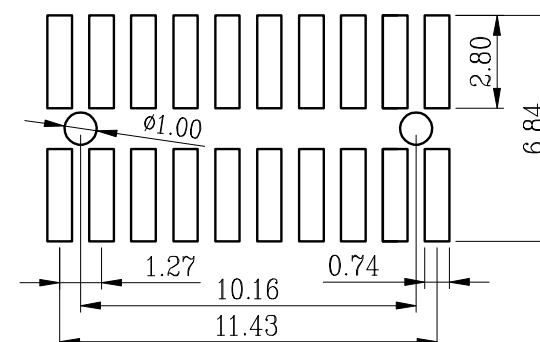
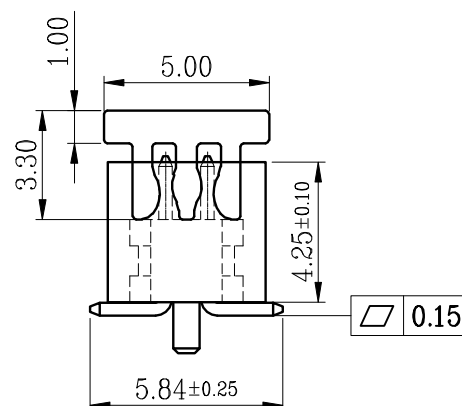
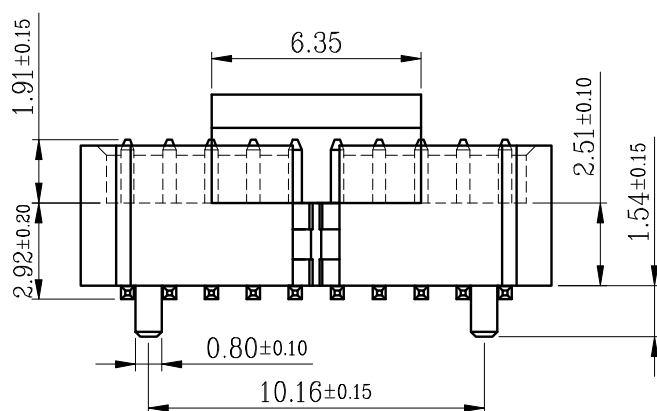


Pin-Header-Strips-Double row for Surface Mount
Technic and High-Temperature Body 1.27mm pitch

Technical data:

Insulator body	High Temperature Thermoplastic,UL 94V-0
Contact: material:	0.40mm x 0.40mm copper alloy
plating:	Selective gold flash plated
Current Rating:	1 Amp
Insulator resistance:	500 Megohms min.
Dielectric withstanding:	AC 500 V for 1 minute
Temperature Rating:	-40°C to +105°C.
Max. processing Temp:	230°C for 30-60 seconds. 260°C for 10 seconds.
Mates with:	605,606,&134.
Packing:	With cap in Tape & reel

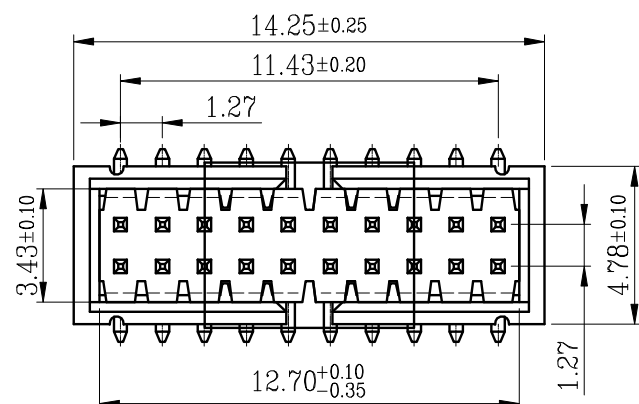

P.C.B layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.05

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

PAB-V29P19C-2X10-LF

SERIES 20 WAY LEADFREE
CAP CONTACT 1.91mm
POST 2.92mm HIGH
180°SMT

DESCRIPTION: