


Specifications

Current Rating: 1.0Amp
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 300VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

Recommended P.C.Board Layout (Tolerance: ±0.05)

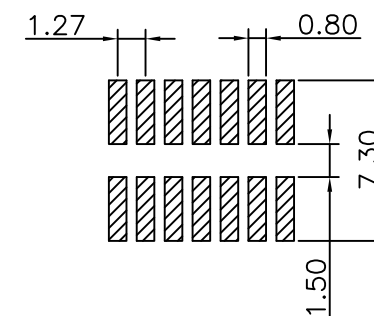

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

X ± 0.30

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.10

ANG ±

www.morethanall.com

SIZE A4

PJECTION

照片框

ORDER INFORMATION

PAB-V55XC-2Xxx-LF
 SERIES | LEADFREE
 | 2X05:10 WAY
 | 2X50:100 WAY
 180°SMT | CAP
 HIGH 5.5mm | NON POST

DESCRIPTION: 1.27 BOX HEADER DUAL ROWS SMT TYPE CONNECTOR