

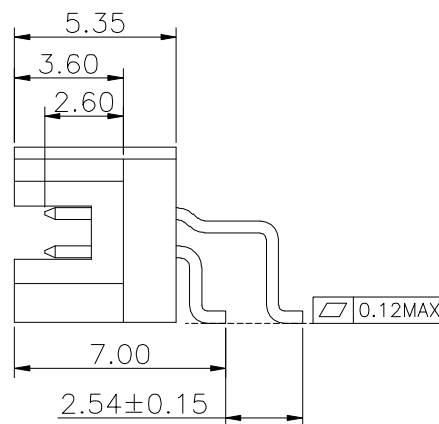
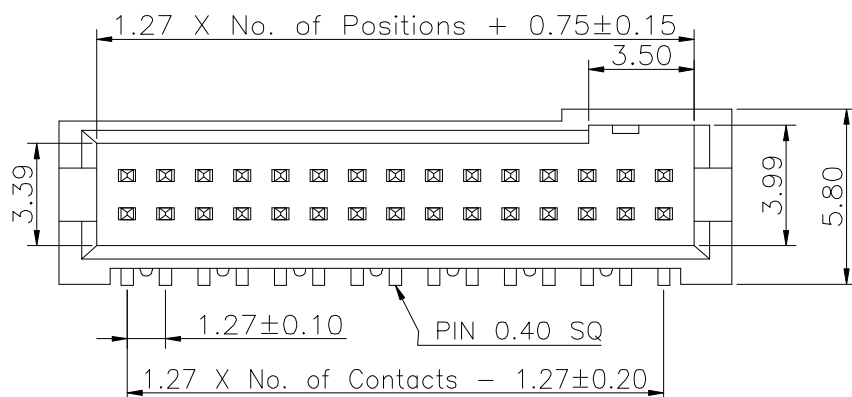


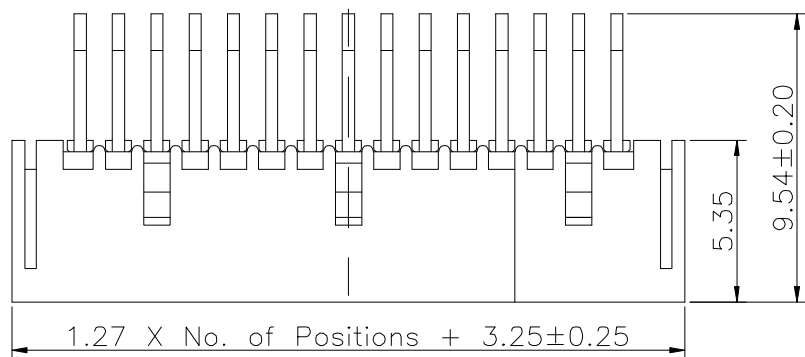

Recommended P.C.Board
Layout
(Tolerance:±0.05)

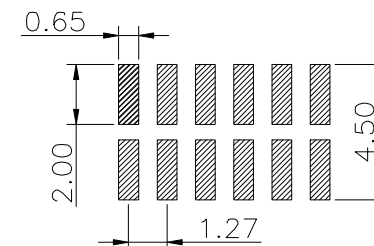

Specifications

Current Rating:1.0Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:300VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C

Materials

Contact Material: Phosphor Bronze

Insulator Material:High Temperature

Thermoplastic, UL 94V-0 LCP

or the equivalent material

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

PAB-WX-2Xxx-LF
SERIES LEADFREE
2X05:10WAY
2X30:60WAY
NON POST
90°SMT

DESCRIPTION: 1.27 FEMALE HEADER DUAL ROWS SMT TYPE W/POST