

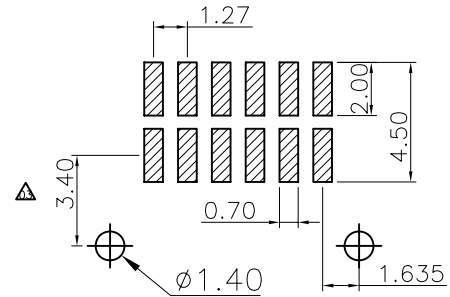



Recommended P.C.Board Layout  
(Tolerance:  $\pm 0.05$ )

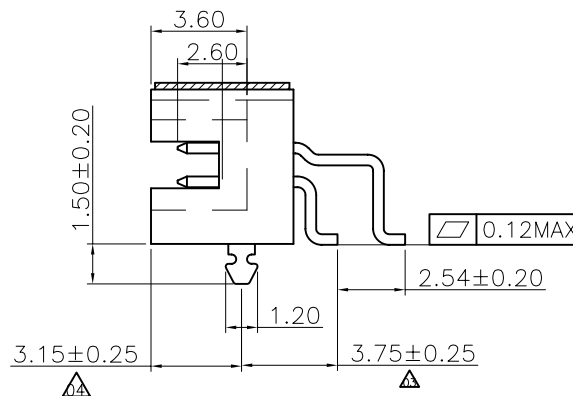

Specifications  
 Current Rating: 1.0Amp  
 Insulation Resistance: 1000M $\Omega$ Min.  
 Dielectric Withstanding Voltage: 300VAC  
 Contact Resistance: 20m $\Omega$ Max.  
 Operating Temperature: -40°C to +105°C  
 Materials  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature  
 Thermoplastic, UL 94V-0 LCP(Nylon) or the equivalent material

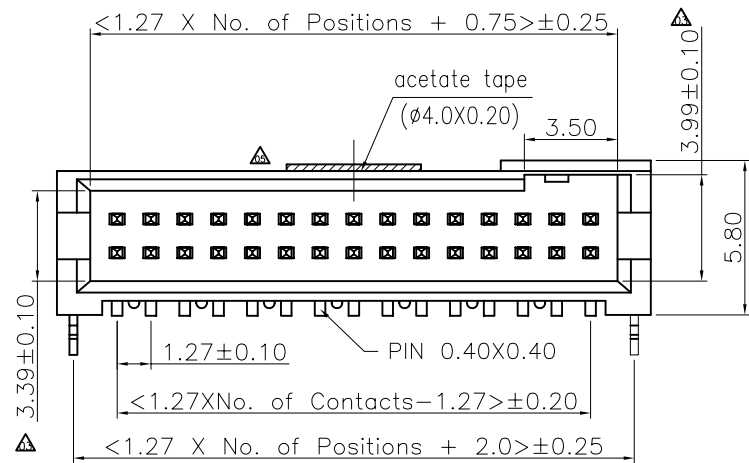

No. of Pins per Row  
 05.06.08.10.15  
 20.22.24.30

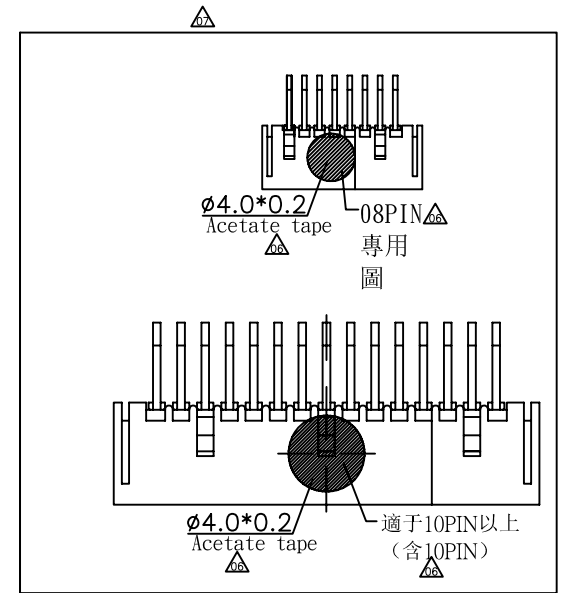

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X.  $\pm 0.30$   
 .X  $\pm 0.25$   
 .XX  $\pm 0.15$   
 .XXX  $\pm 0.10$   
 ANG  $\pm$

PJECTION

照片框

ORDER INFORMATION

PAB-WZC-2Xxx-LF

SERIES

LEADFREE  
 2X05:10WAY  
 2X30:60WAY  
 MYLAR  
 CLIP  
 90°SMT

DESCRIPTION: 1.27 BOX HEADER DUAL ROWS SMT TYPE SIDE ENTRY