


No. of Contacts	DIMENSIONS		REMARK (備註)
	A	B	
10	5.08	9.35	○
12	6.35	10.62	○
14	7.62	11.89	○
16	8.89	13.16	○
18	10.16	14.43	○
20	11.43	15.70	○
22	12.70	16.97	○
24	13.97	18.24	○
26	15.24	19.51	○
28	16.51	20.78	○
30	17.78	22.05	○
32	19.05	23.32	○
34	20.32	24.59	○
36	21.59	25.86	○
38	22.86	27.13	○
40	24.13	28.40	○
42	25.40	29.67	○
44	26.67	30.94	○
46	27.94	32.21	○
48	29.21	33.48	○
50	30.48	34.75	○
52	31.75	36.02	○
54	33.02	37.29	○
56	34.29	38.56	○
58	35.56	39.83	○
60	36.83	41.10	○
62	38.10	42.37	○
64	39.37	43.64	○
66	40.64	44.91	○
68	41.91	46.18	○
70	43.18	47.45	○
72	44.45	48.72	○
74	45.72	49.99	○
76	46.99	51.26	○
78	48.26	52.53	○
80	49.53	53.80	○
82	50.80	55.07	○
84	52.07	56.34	○
86	53.34	57.61	○
88	54.61	58.88	○
90	55.88	60.15	○
92	57.15	61.42	○
94	58.42	62.69	○
96	59.69	63.96	○
98	60.96	65.23	○
100	62.23	66.50	○

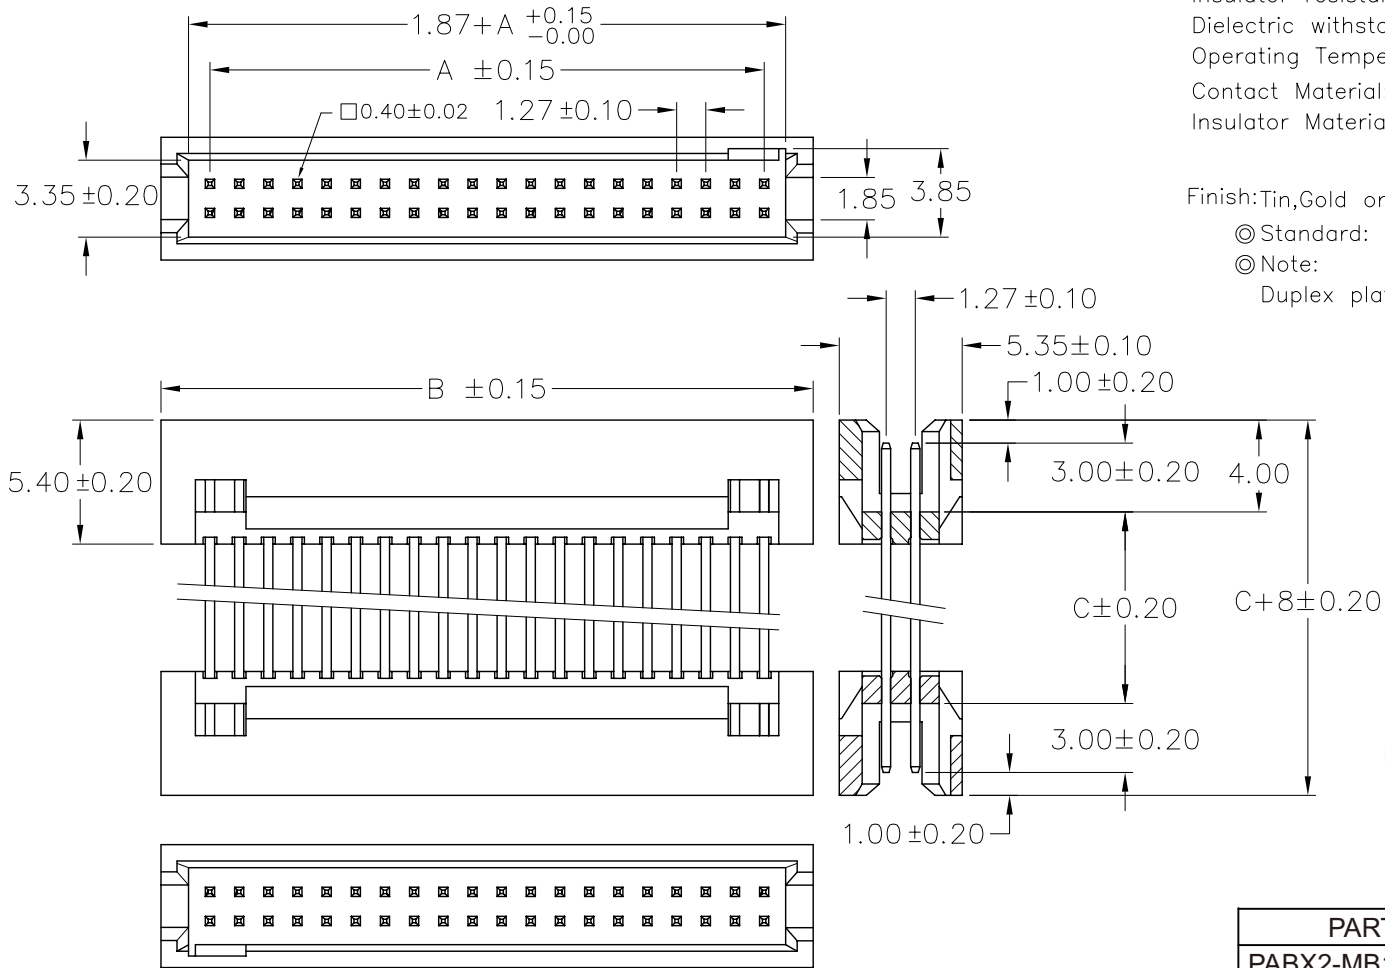

SPECIFICATIONS

Current Rating: 1 Amp
Insulator resistance: 5000 Megohms min.
Dielectric withstanding: AC 500 V
Operating Temperature: $-40^{\circ}\sim+105^{\circ}\text{C}$
Contact Material: Copper alloy
Insulator Material: High Temperature Thermoplastic, UL 94V-0
Color : Black
Finish: Tin, Gold or Duplex plated
◎ Standard: Gold flash all over
◎ Note:
Duplex plating: gold plated on contact area, Tin on solder area

PABX2-MBxxx-2Xxx-LF
LEADFREE
2X05:10WAY
2X50:100WAY

PARTS NO.	C
PABX2-MB100-2Xxx	10.0
PABX2-MB106-2Xxx	10.6
PABX2-MB146-2Xxx	14.6
PABX2-MB160-2Xxx	16.0
PABX2-MB192-2Xxx	19.2
PABX2-MB272-2Xxx	27.2

RoHS Compliant

MOORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. PABX2-MBxxx-2Xxx

DWG NO. PABX2-MBxxx-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE
X ± 0.50
.X ± 0.30
.XX ± 0.25
.XXX ± 0.20
ANG

DESCRIPTION:

AREA

REVISIONS

DATE

煜倫股份有限公司