

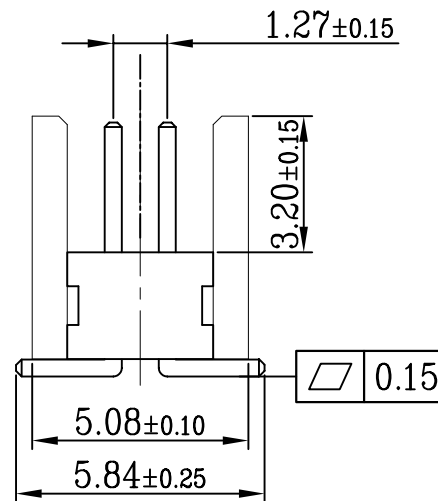
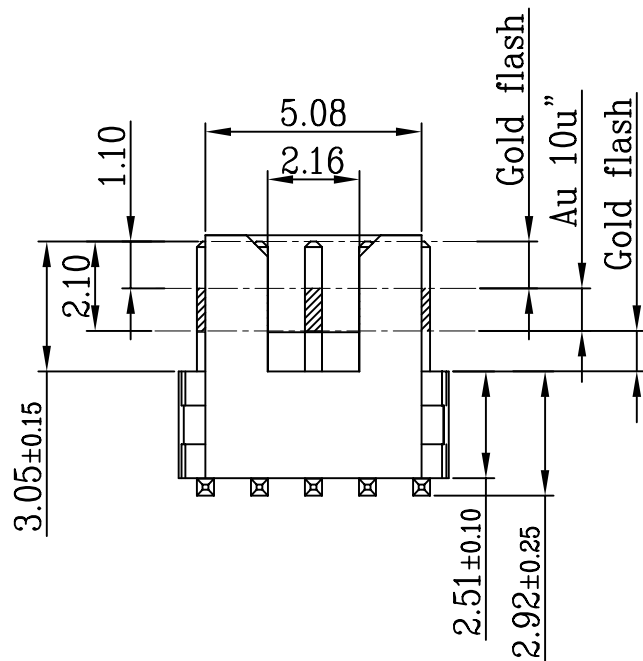


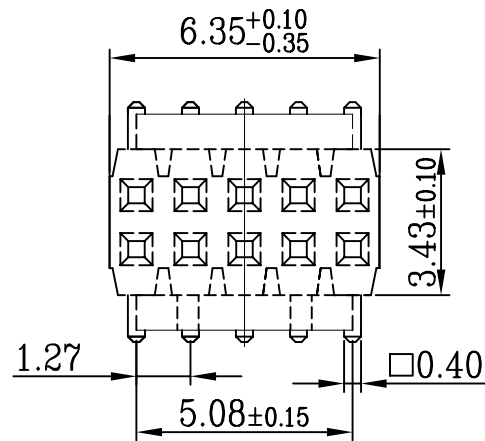

Pin-Header-Strips-Double row for Surface Mount
Technic and High-Temperature Body 1.27mm pitch

Technical data :

Insulator body High Temperature Thermoplastic,UL 94V-0
Contact: 0.40mm x 0.40mm
material: copper alloy
plating: 10u" Au plated on contact area
Tin plated on solder area over nickel
Current Rating : 1 Amp
Insulator resistance : 500 Megohms min.
Dielectric withstanding : AC 500 V for 1 minute
Temperature Rating: -40°C to +105°C.
Max. processing Temp: 230°C for 30-60 seconds.
260°C for 10 seconds.

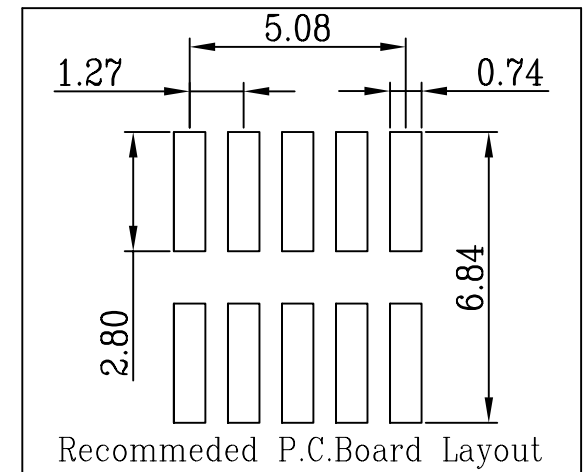

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±



ORDER INFORMATION

PAK-V29X30-2X05-LF
SERIES LEADFREE
10 WAY
CONTACT 3.05mm
NON POST
HIGH 2.92mm
180°SMT

DESCRIPTION: