
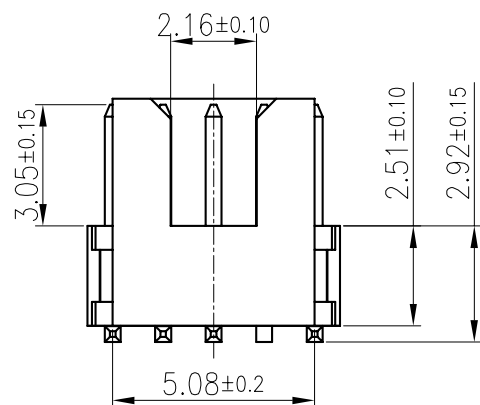
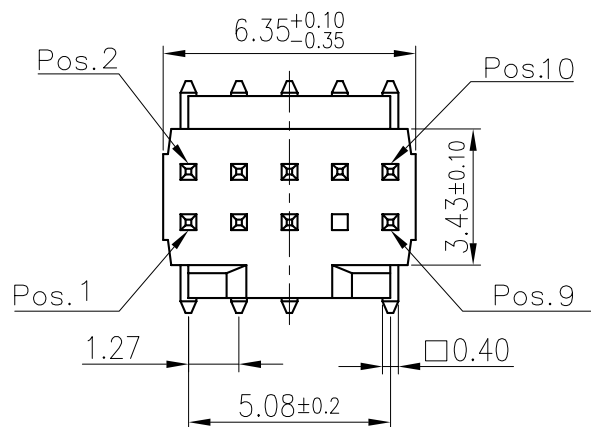


Remarks:
☒ With Pin
☐ Without Pin


Pin Distribution Diagram

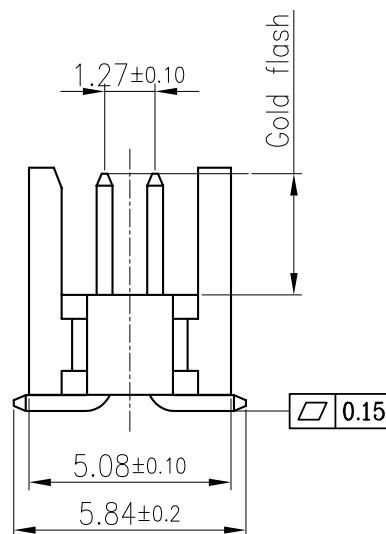

Pin-Header-Strips-Double row for Surface Mount
 Technic and High-Temperature Body 1.27mm pitch

Technical data :

Insulator Material : High Temperature Thermoplastic,UL 94V-0
 Current Rating : 1 Amp
 Insulator resistance : 500 Megohms min.
 Dielectric withstanding : AC 500 V for 1 Minute
 Contact : 0.40mm x 0.40mm
 Contact Material : copper alloy
 Plating : Selective gold flash plated on contact area and Matte tin plated on solder area over Nickel
 Operating Temperature : -40 °C to +105 °C.
 Max. processing Temp : 230 °C for 30-60 seconds.
 260 °C for 10 seconds.
 Mates with : 1.27mm Female header & 134
 Packing : Tube
 ROHS compliant

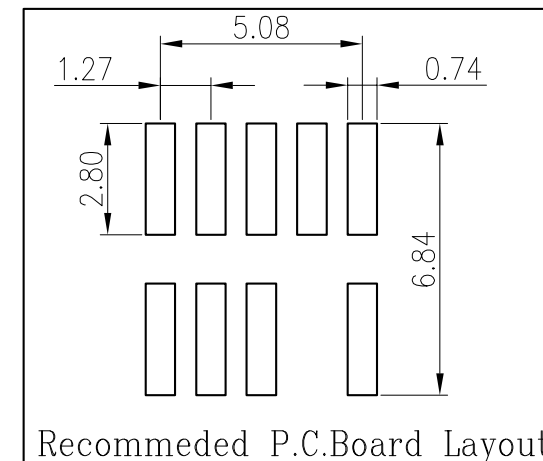

Recommended P.C.Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.30
 X ± 0.25
 .XX ± 0.15
 .XXX ± 0.05
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PAK-V29X30-2X05E7-LF
 SERIES LEADFREE
 EMPTY#7
 10 WAY
 CONTACT 3.05mm
 180°SMT NON POST
 HIGH 2.92mm

DESCRIPTION: