
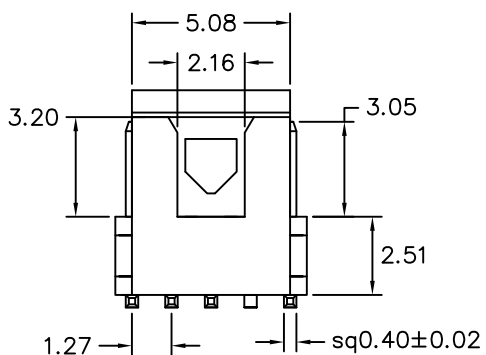
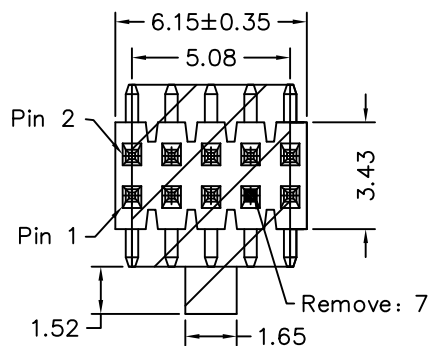


Recommended P.C.B Layout

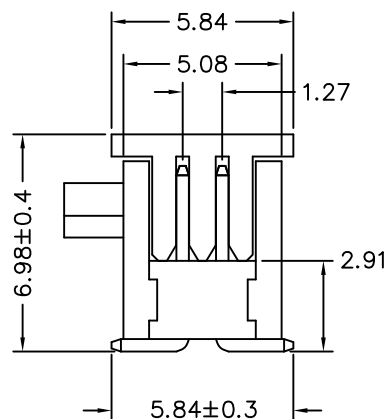

MATERIAL

Contact Pin : Brass

Insulator: NY10T UL94-V0

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operating Temperature: -40°C to +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

PAK-V29X30C-2X05E7-LF
SERIES | | | | | LEADFREE
| | | | | EMPTY#7
180°SMT | | | | | CAP
HIGH 2.92mm | | | | | CONTACT 3.05mm
| | | | | NON POST

DESCRIPTION: PIN HEADER 1.27*1.27mm SMT S/T TYPE, DUAL ROWS CAP+T/R